G. R. S. 58]

Previous references.

43 – 01.

File No. ~~44 of 1900-01.~~

1901-902

(Sanitation)

Serial Nos. 16 – 24

Later references.

GENERAL AND REVENUE SECRETARIAT.

Serial Nos. 1 – 24 –

Major **Part B for** February 1904

SUBJECT.

Sanitation of Hoskote Town.

P 15/5/(1 K)

X

~~From~~ the Dy: Commr: Bangalore District

Dy No: 7431. No: 558 of 4·11·90.

Submits for sanction an alienation Statement of land proposed to be given in lieu of the Inam land taken up for the improvement of the Hoskote town

2

To the Dy: Commr: Bangalore Dist:

No: 9527-9 of 25·11·90

Sanctions the recommendation in Dy No: 1.

GPE—3,500—21-7-14

From the Dy: Commr: Bangalore Dist:

Dy No: 8411. No: 754 of 4·1·901

Submits for orders copies of two memoranda regarding

the Sanitary Condition of Hoskote.

2. To the Senior Surgeon as Sany: Commr.
No. 12816-18 of 4.2.02

Forwards Copies of Sl. No. 3 for opinion

3 From the Senior Surgeon as Sany: Commr.
By No. 1951 No. 4535 of 12.3.02.

Offers the opinion called for in Sl No. 4.

4 From the Chief Engineer Mysore Govt.
By No. 1208/1574 No. 1582 of 17.3.02.

Forwards the Chief Engineer's Suggestion that some of Mr. Lee's proposals might be tried before adopting the removal of the Village referred to in Sl 4 or the removal of the Taluk Cutcherry and breaching the Chickakere Tank.

5. To the Dy: Commr. Bangalore Dist & the Comptroller
No. 648-52/39-01 of 26.7.02.

Directs the Suggestions of Mr. Lee being carried out Vide Sl No. 4.

6. From the Senior Surgeon & Sany: Commr.
By No. 2571 No. 734 of 3.9.02

Forwards the Inspection report of the Chemical Examiner regarding Mosquito breeding at Hoskote town

7. To the Senior Surgeon and Sany: Commr:
No. 4455 of 23.9.02

Records Sl 8 with a request that the Senior Surgeon would report the result of Dr. Srinivasachar's further investigation

8 From the Asst: Commr. in Mysore
By No. 2475 No. 2058 of 21.4.03.

~~Forwards~~ States that certain remarks on the Conduct of the Amildar of the Taluk have been noted in the Asst. Commr's Office

9. From Thanjundiya & others of Hoskote
Dy ct. 12403. dt. 2706 of 8.5.03.

Prays for the reasons stated that the work of breaching certain Kunte in the Hoskote Town may be stopped.

10. To the Dy: Commr. Bangalore dist.
dt. 1707 of 1.6.03.

Forwards Sl: No. 11 for early report.

12. From the Presdt. Bangalore District
Dy ct. 13357/2327 dt. 1405 of 11.6.03.

Submits the report called for in Sl dt. 11

13. To the Presdt. Bangalore dist.
dt. 174 of 3.7.03.

Enquires as to whether the Kunte referred to in Sl. 13 is the Chikere referred to in Sl. 7 or a different one as in the latter case whether want of water complained of by the petitioners would not be felt.

15 From the Presdt. Bangalore dist.
Dy dt. 47. dt. 26 of 8.7.03

States in reply to Sl dt. 14 that that tank is not the Chikere Tank and that it has since been arranged not to breach the pond in question.

16. To the Rev: Commr. & the Dy: Commr. Bangalore dist.
dt. 586-7 of 3.8.03.

To the Rev: Commr. & the Dy: Commr. Bangalore dist.

Records Sl dt. 10 with the remarks that the

Vice Presdt. should be warned to show more activity
in the matter of improving the Sanitation of the Town.

15 To the Dy: Commr. Bangalore dist.
No. 626 of 5.8.03.

Requests to dispose of the matter of stopping
the breaching of certain Kunti referred to in 5&15 so
as to insure Sanitation without materially effecting
the water supply of the town.

16 From the Dy: Commr. Bangalore dist.
Dy. No. 1263. No. 93 of 31.8.03.

Forwards for information Copy of Communication
in regard to improving the Sany: Condition of the Hoskote Town

17 To the Dy: Commr. Bangalore dist.
No. 1510 of 26.10.03

Requests to report the further Action taken
regarding the improvement of the Sany: Condition
of the town.

18 From the Senior Surgeon & Sany: Commr.
Dy. No. 1207. No. 314 of 27.11.03.

Forwards Copy of a Communication relating
to the improvement of the town of Hoskote.

20 From the Presdt. Bangalore Dist.
Dy: No. 1213. No. 481 of 28.11.03

States that the Senior Surgeon was requested
for his opinion on the Sany: Condition of Hoskote Town

22. From the Presdt. Bangalore dist.
Dy. No. 1333 No. 516 of 12.12.03.

Recommends the redemption of certain Sites
at Hoskote

L.C.F. 39—1901

Office Notes

Sang 43-01

Office of the Dewan of Mysore.

File No. (if any)

Directions.

No., date and purport of receipts to be entered in red, and office note in black ink in order of dates.—To be written only on one side, and inside the line of margin.

Office Note.

Branch. Revenue

SECTION Sanitary

FILE No. 63-01

SERIAL No. 1-24

Subject.

Letter No. 2058 of 21-4-03 from the Revenue Commissioner in Mysore forwarding for information copy of a letter from the Dy. Comr. and President of the Municipalities-Bangalore District submitting Extracts from his notes of Inspection of the Hoskote Municipality and of the Municipal and District Fund Accounts of the Hoskote Taluk reflecting on the conduct of the Amildar.

(1) Notes of Inspection on the Hoskote Municipality:-

Some months ago Govt. sanctioned the Expenditure of Rs. 2000/= for the draining of the town & filling in pits &c. In spite of his (Dy. Comr's) repeated instructions the Amildar it was found during inspection that very little work had been done. The excuse urged by the Amildar for this were the outbreak of plague & the failure of private owners to attend to his orders to fill up the pits in their Hitals. The Amildar did not also carry out his instruction to divert any water from entering the dry pits, and allowed fresh pits to be dug on cultivable lands for the purpose of brick-making against the Rev. Rules. The Excuse urged by the Amildar could not be accepted. He has been asked to report at once

how the pits were allowed to dry on cultivable lands and also to push on with the Sanitation works submitting him a weekly progress report.

(2) Notes on the Inspection of the Municipal and District Fund roads in the Hoskote Taluk.

Some months ago Govt. sanctioned Rs. 2000/- for the draining & levelling of pits in the town of Hoskote. During inspection it was found that in spite of repeated instructions to the Amildar that work to the Extent of Rs. 300/- had been carried out. This is most deplorable and shows the apathy of the Amildar who is now directed to push on with the work as fast as possible. The work Inspector appears to be thoroughly incompetent & his service will be dispensed with at an early date.

The Revenue Commissioner states that the remarks made by the president on the Conduct of the Amildar of the Taluk have been noted in his office.

Subs. [illegible] Secretary
BK
6/7/03.

in
9/7/03

This may be recorded with
but I think the remark that

Office of the Dewan of Mysore.

File No. (if any)

Directions.

No., date and purport of receipts to be entered in red, and office note in black ink in order of dates.—To be written only on one side, and inside the line of margin.

Office Note.

Branch

Subject

Hee~~=~~ the President ~~should be~~ be warned to Should show more activity in these matters.

The President's reference should have Come to Govt~~=~~ direct~~=~~ who, if they ~~had~~ Considered it necessary might have Communicated their order to Rev~~=~~ Cr~~=~~ for infn~~=~~. This at any rate is ~~the~~ what I understand from the rules of procedure in force.

Draft submitted.

15/7/3

(L Bdy Br.)

To the Dewan,
through the 2nd. Councillor.

To the D[illegible]
through [illegible] Councillor.

Draft submitted
16.7.03

To L.Bdy
15/7/03

11567
20.7.03

Hee~~=~~ the Resident has referred to the excavation of pits on cultivable land and to the violation of Revenue Rules - This therefore does not seem to be a purely municipal matter -

Draft ~~approved~~, ~~if~~ the Resident ~~has referred to the~~ has referred to the excavation of pits on cultivable land and to the violation of Revenue Rules, I think

have prepared an order
of census [redacted]

2/7/03

5

The allusion to Rev. Rules seems to be in my humble opinion only a minor matter. In deference to the above opinion of the Comptroller, either to no mention may be made or a remark as I have appended in pencil on the draft may be added.

24/7/3

24/7/03

To the Director,
through the 2nd. Councillor.

130
Rd. 25-7-03.

Thanks. The draft as originally ~~drafted~~ amended may ~~go~~ if the reasons is submitted only for the Vice President of the Municipality.

25/7/03

27/7/3

033 56

Memorandum
Council
28. VII. 03

11771
27.7.03

No. 31/7/03

6

DEWAN'S OFFICE.

GENERAL DEPT.—(L. B. BRANCH).

OFFICE NOTE.

SUBJECT. Improving the sanitary condition of Hoskote.

LAST REFERENCE Letter No. 1582 dated 17th March 02 from the Chief Engineer of Mysore.

Letter etc 754074-1-01 (sl 1)

Under date the 6th January 1902 the Dy: Commissioner of the Bangalore District submitted for the orders of Government two memos one prepared by himself and the other by Mr Kumaraswamy Naik Assistant Commissioner offering

MGOPB—250—18-3-02

offering suggestions to improve the "notoriously" insanitary condition of Hoskote. Mr. Kumarasamy Naik attributes the unhealthy condition of the town to the following causes:-

1. Its situation in a valley
2. Its close proximity to two large tanks.
3. The existence in the town of 99 houses rendered vacant during the prevalence of plague.
4. The number of ruined wells which are used as to many latrines in the town
5. Cultivation of potato in and around the town
6. Absence of a proper

drainage system.

(7) using Amani Chikkere water for drinking purposes.

Mr. Kumaraswamy Naik suggests the removal of the town to a healthier site, if funds permit. As an alternative, he suggests the following simple measures for improving the town:-

(1) The Amani Chikkere which is nearer the town and which does not yield more than Rs 390-0-0 a year should be breached at once and the tank bed (about 334 acres) should be given out for dry cultivation.

(2) The deserted houses

houses and ruined walls in the town should be demolished if no owners are forthcoming.

(3) The prohibition of potato cultivation in the immediate vicinity of the town, and the introduction of Kirinjali cultivation which is equally paying and does not require even 1/10 the quantity of manure required for potato cultivation

(4) Introduction of a good drainage system out of municipal funds borrowed from Government.

He considers that, there being any number of vacant sites and buildings lying waste in

in the town, the proposal of extending it does not seem likely to be attended with success.

The Dy: Commissioner suggests two alternative remedies :-

1. Removing the Taluk Head quarters to Hullur, if the Assistant Commissioner considers the proposal feasible.

2. Prohibiting wet cultivation round the town and breaching the Chikkere.

In the body of the letter however the Dy: Commissioner thinks that the removal of the Taluk Head quarters to a healthier site involves the construction of

Public buildings and consequently large outlay. He ~~transmission of this~~ therefore solicits orders to ~~be~~ branching the Chikkere by the P. W. D.

The subject was referred to the Senior Surgeon and the Sanitary Superintending Engineer for their opinion

Docket no 12816-W 14.2.02
39.01
(Pl no 2).

Mr Lee considers the measures suggested by the Assistant Commissioner and the Dy: Commissioner as unnecessary and useless, some on technical ~~and~~ while others on financial grounds and recommends the following measures for early adoption :-

Mr Lee's letter no 5532/W
dt 13.3.02.

1. The demolition of

of ruined walls. the earth being used for filling up hollows in the town.

(2) The improvement of the surface flood water drainage.

(3) The filling in of the North Fort ditch to the extent of about 3 feet by earth from the ruined ramparts close to it

(4) The giving out of the site of the Fort 20 acres for cultivation to prevent its use as a latrine, and the growth of noxious vegetation.

(5) The removal of houses all round the Taluk Cutcherry for

for a space of about 200 ft.

16, The custody and conservancy of 99 plague deserted houses.

17, The defining of the town limits to an area commensurate with the population, 3770 souls

18, The prevention of houses outside such limits.

19, The gradual shifting of the 50 houses from Kalagama Tagalawa pet, which lies low and is damp, higher up the rising ground.

These measures he considers to be inexpensive and recommends a special grant of Rs 2000/- for the purpose

the

The Senior Surgeon, after personal inspection of the town with Mr. Sreenivasa Rao, reports that Mr. Lee's suggestions are just what are required and at the same time very inexpensive and recommends that the several measures may be put in hand, except that of removing the houses round the Taluk Cutcherry for a space of 200 yards.

The Chief Engineer forwards Mr. Lee's report and observes as follows:-

"Before adopting the drastic measure of removing the village on the Taluk Cutcherry, and breaching the Chikkeré tank

tank which supplies the town with drinking water, the undersigned would suggest that Mr Lee's proposals vide para 7, or some of them, may be tried. They will all be beneficial except nos 7 and 8, the object of which is not apparent."

Submitted for orders.

WJ 29/03/02

Note below the financial Condition of the Municipality.

HB
4/4.

1. Opening balance = 1190
2. Estimated receipts = 3620
   Total 4810
3. Estimated expenditure = 3245
4. Closing balance = 1565

WJ 5/4/02

It is doubtful Whether in the present

State of finances, a
Provincial Grant of
Rs 20000/. Could be made
for the improvements
of the Hooghly Town.
The Commissioners
may therefore be requested
to call upon the Municipal
Board of Hooghly to
decide which of the
works named by the
Superintending Engineer
Sanitary Circle could
be taken up & completed
during the
Current Year out of the
Closing balance of Rs 1565/.
at the credit of the
Municipality, and to
prepare & submit Estimates
for all the works except
the one relating to the
removal of houses round
the Dalude Catchment &c

vices to necessary provision
being made in the Ensuing
Years Municipal Budget
according to the urgency
of the works.

Ltd to Secty. [illegible]
28/4
[illegible]
15/4/1902
The 3rd Councillor

(6161) [illegible] Town Council
[illegible] condemned
as unhealthy and
[illegible] unfit
and also should
[illegible] to improve
it if at any
[illegible] the
[illegible] suggested
[illegible] and
[illegible] of
[illegible] Council
[illegible] Municipality
[illegible] Rs 15000 of
[illegible] Estimate, the
[illegible]

GOTTINGEN STATE

[illegible]

Submitted to the

Dewan

30/7

Received
2.5.02
4360 6130

I agree - with the recommendation enabled by the Secretary communication be carried out. Meanwhile of the further grant of pay may be suspended for the present.

Dr Somerville may be asked to be recommended(?)

19.VII.02

D.A.

24/7

H.V.R. 24/7/02

RD 22/7/02 Drafted. #618 dtd 22.7.02

With reference to the above orders contained in Govt Proc No 1648-52 (2:6) L.739-07 of the 26th July 1902, the Senior Surgeon submits No 9738 3-7-02. (Sl 7) letter No 91 (Sl 7a) of the 30th Augt-02 from Dr Stanley Hall, Guinea Row he went to Hoshoke in Augt 1902, that

that he did not find any anopheles larvae in the pits near houses or in the stagnant pools of water about the edge of the Amani Chikkere, that the number of mosquitoes this season was much less than in previous years and that there were fewer cases of malarial fever, that it remains to be seen how the health of the place would be affected after the heavy rains, and that he would propose to take a trip to Hoskote again to see whether the mosquitoes breed in large numbers.

Draft recording this communication with a request that the result of Dr Srinivasa Rao's further investigation may be reported to Government, is submitted

~~Sd/- D. to Secty~~.

9.9.02 15/9/02

Draft appd. [illegible]

22/9/1902.

Nanjundappa and other
inhabitants of the Hosakote Town Complain
that the Dy Commissioner, with a view to improve the sanitation of the town, has ordered
to breach a Kunte that is situated
in a good locality and supplies
healthy water, for men & cattle ~~of~~
~~the town~~; and pray that early orders
might be passed setting aside the
Dy. Com'rs order and stopping the
work of breaching the Kunte on
the following considerations:—
(1) That the Kunte is situate
in the midst of the grazing grounds
of the Hosakote cattle & supplies good
water for them for many months in
the year;
(2) That ~~the~~ no water other than that of the tank is ~~is~~ available
~~adequate~~ for extinguishing fire when
the grass in its vicinity ~~takes fire~~ catches &
and burns;
(3) That if the Kunte is breached,
water will not be available for
about ~~a mile~~ $\frac{3}{4}$ of a mile, from it; on which more than 300 Rs were spent.
& want of water will be much felt by residents of 2 Petahs.
(4) That no medical officer has

has examined and pronounced it to be unhealthy for drinking purposes

In Spl. Pro. No. 1648-52 / 1739-01 dy 26-7-02, the Government were pleased to direct that the improvements suggested by Mr Lee and concurred in by the Senior Surgeon & Sanitary Comr. be carried out as early as practicable But the breaching of the Kunte was not one of the works recommended by Mr. Lee for execution; nor does the reports of Dr. Srinivasa Rao contain any information regarding the Kunte.

Sl. 6 para 4 of the order portion ~~Flagged~~

Page 1 of the proceedings.

Sl. 7. ~~Flagged~~.

Submitted for orders as to whether the Petn may be forwarded for early report and stay of the breaching of the tank.

Dy 25/5/03

Dy 25/5/03

Ord for rept.

Yes

Sr. J. dy 27/5/03 dy 26/5

The Petition having been forwarded for report, the Collector states that this (breaching of the tank) is part of the scheme suggested by the Senior Surgeon and Sanitary Comr for improving the sanitation of the town and that the scheme is to be

Letter dtd 1408 Dy 11/6/03.

effectually carried out, the Kuntz must either be drained or filled in. The Precedent considers that the draining is unnecessary, as it is found that all water now flowing into the Honda can be diverted and the hollow filled up hereafter and adds that no loss will therefore accrue to the Petos.

It is not clear whether the Kuntz herein referred to is the Chickeen Tank referred to in para 2 of Proceto 1648-02 / L-939-01 dy 26.7.02. or a different one. & in the latter case whether want of water complained of by Petos would not be felt. May further report be called for

Submitted for orders.

Dy 24/6/03

'Flag A'

25/6/03

27/6

The Director through 2nd Councillor

Yr. Please call for the information on receipt of which I shall inspect the place in company with the Dy Conr before recording my decision

29/6/03

L.S. 92/ 27-6-03

Noted, 29.6.03

29/6/03

Sr. D. 29/6/03

The

The above enquiry having been made in this office Docket ex $\frac{174}{L.939.01}$ of 3.7.03, the President reports that the tank, the breaching of which was complained of, is not the Chekkeve tank but merely a water "hole" at some distance from the said tank and that it has since been arranged, on a personal inspection, not to breach this "hole" or pond, but merely to divert any water flowing into it. He adds that if the pond is filled up or kept dry, it does not interfere with the water supply of the surrounding houses.

ex to 26 of 8.7.03.

Submitted for orders. Please see II Cr's note of 29/6/03.

Exg 10/7/03

The diversion of the water flowing into the "Kunte" is equivalent to the breaching thereof, tho' the latter is not actually carried out, but as the President says that the diversion is necessary for carrying out the Scheme of improving the Sanitation

of the Hoskote Town, and as the Petitioners on the Spot raised complain of the inconvenience to which their Cattle would be put for want of water in the tank in question, the matter may, if approved, be referred to the Senior Surgeon & Sanitary Commissioner for Opinion on personal inspection of the locality. Solicitor's.

HFB

16/7/03

Probably the President's view is Correct. I am not sure if the matter requires a reference or further inspection. The President may be asked to dispose of the matter. Submitted with draft.

HFB 18/7/3

18/7/3

To the Dewan,
through the 2nd. Councillor.

I agree that no further reference is necessary. Draft

HFB 24/7

11812/29.VII.03

Read 29-7-03

The above order was conveyed to the

A President in Gj. P. No 626 / d. 7. 27-07 Dy 5th Aug: 1903.

Letter 938 Dy 31-8-03.

The President now forwards, through the Rev. Commissioner, for the information of the Govt: a copy of his letter to the Senior Surgeon and Sanitary Commissioner, wherein the latter is requested to inform whether the filling in of the north fort ditch of the town, which was one of the sanitary measures suggested by Mr Lee & approved of by the Govt:, will do much good to the inhabitants, considering that the ditch referred to is situated one furlong from the nearest habitation.

Page 4. B.

May this be simply filed, and further report awaited? Submitted for orders.

Dy 15/9

17/9/03

S. M. O.
Please send
reminder as to the
matter noted Sept 1903
Draft reminder
sent Dy 17/10/03

If further report from the President re the filling up of the north fort ditch of the town is yet to be received in this office.

As the genus culex; that no larvae were noticed anywhere in ditches & filled with water; and that if proper arrangements are made to prevent the stagnation of water near the waste weir of the "Nalla" or ditch which receives the drainage of the town and discharges it into the Hoskote big tank, the town will lose the notoriety it has acquired for malarial fevers.

Submitted for orders.

Mg 8/10/03

Draft order recording D and communicating to Dr Srinivasa Rao's letter to the President of the District & Municipal Boards, Bangalore for his & Sanitary Engr's opinion. Draft is laid for approval.

13/12/03 15/12

Yes - This is pressing Co-Sanitary Engr - C.

19 - 12 - 03

The Dewan through the Secy Councillor

14790/19.+11.03

flag A

In Govt Proceedings No 2717-18 dy 27-1-04
L.F. 39-01

Dr. Sreenivasa Rao's letter was communicated to the President and his attention was drawn to the suggestion made by the former regarding the prevention of the stagnation of water near the waste weir of the Valla or ditch.

The Commr. to whom the Senior Surgeon had forwarded copies of Dr Sreenivasa Rao's letter referred to ~~[illegible]~~ the Agent and the Executive. So, ~~[illegible]~~ ~~[illegible]~~ the Executive ~~[illegible]~~ ~~[illegible]~~ Dr Sreenivasa Rao, states, that it is useless to try to fill the ditch referred to, as it is the Kodi Kallah of the Chitkatkere tank; that it will be sufficient, if the lower Kodi is abandoned, and an aequaduct, constructed, on a bridge to drain the water from the present ditch, and that the Executive Engineer

No. 5780 6/1/04
L 1473

Please send [illegible] Dr Rao

Yes. Write to Executive Engineer to have the lower Kodi abandoned and the water drained off by a culvert as suggested by Dr Rao

will be requested to prepare an estimate for the said aequaduct.

May the submission of the estimate be awaited? A copy of the Communication sent to Dr Srinivasa Rao thro the Senior Surgeon for info.

Flag C
in lieu of the second Inam Lake taken up for building sites, the Dy Coms

⊗ With reference to Govt order etc 9.5.27 9 of 25/11/90 on the grant of Inam 390 states that the Taluq Cutcherry of Nortore stands in a large compound having two sides free and open. One of these sides forms the Survey No 69 measuring 2 acres & 29 guntas and is situated in front of the cutcherry and the L.F dispensary. The Survey No was formerly a devadaya Inam which ~~was~~ had been acquired in 1890 for housebuilding purposes. It was allotted into 29 sites, of which 28 were sold for Rs 553, which was credited to the Municipal funds. It is (X) reported that only two buildings have been raised on three of the sites, and that no attempt has yet been made to raise any buildings on the other sites.

President's letter
No 516 Dy 12-12-05.
L 1333

In 1902 Mr Standish Lee inspected the town and suggested, on sanitary grounds, that the cutcherry should be kept free of houses all round for a space of about 200 feet. But the Govt ~~(Communicating with the Senior Surgeon, Bpay)~~ ~~Surgeon, Bpay~~ approved (X) of the Senior Surgeon's opinion that it is not necessary to remove all houses round the Taluk Cutcherry for a space of 200 yards as it stands in a large compound having two sides free and open; and that any good which might accrue from pulling down so many houses would not be commensurate with the expense incurred or the trouble and annoyance it would give rise to.

P. 1648-52 / 2·7 39-01 By 26/7/02
Flag B

The present proposal is quite consistent with the views of Mr Lee - No pulling down of existing houses is proposed - But a few houses do exist where the cutcherry is now - the other houses are not to be built upon - a wide space will be kept free round the cutcherry - the new houses will be low buildings

~~It is therefore clear that the~~ ~~for other houses - Considering that~~ ~~the removal took for several~~ ~~of the~~

As the land in question is reported to be low-lying, and in wet whether more or less water-logged, and objectionable for building purposes —

The President proposes to redeem 21 (out of the 28) sites by refunding the sale amount of Rs 435 to the purchasers, who have all agreed to relinquish their rights on payment of the sale amounts; and states that the remaining 7 sites need not be redeemed, as 3 of them are already built upon, and 4 are far off from the cutcherry and situated on slightly elevated ground.

The Rural Board also proposes to sell for Rs 200, the Rural garden bearing Survey No 37, measuring 1 ac — 11 guntas, which is of no use to the Municipality and give it out

This is to be dismissed as the garden is not kept up. The Rural Board may be asked to sell it to the Municipality or retain it as they like

for cultivation. Deducting this amount, the balance required to resumed the 21 sites is only Rs 235 which can be met from the balance in favour of the Hoskote Municipality.

The financial condition of the Hoskote Municipality is given below:

	Rs
Opening balance on 1st July 1903 as per Comptroller's final accounts for 1902-1903.	2047.
Estimated receipts for 1903 &c..	3081
Total including balance	5128
Estimated expenditure	4146.
	982

which is more than the prescribed minimum by Rs 212.

Submitted for orders as to whether the President's proposal to sell the Sul garden & resume the 21 sites may be sanctioned, subject to his being a supplemental Rs 29/1/04 Bond for the Sanction of Govt.

30/1

JB
30/1/04

I have arranged to visit Hotel Lance during the week - Please put this on Wednesday next

5/2/04

W 5/2/04

S D.
W961

Director Miss Lancaster is anxious to see you Monday the 9th inst at Ascot -

10/2/04

35

A draft sanctioning the proposals submitted. H
31/1/4

Vide Dewan - Dy 2/2 - 2nd - principle

Dr Sreenivasa Rao does not want the details in question to be settled now - all that he says is that Mysore arrangements should be made to implement the declaration of water in the Malla. There is a Malla running thro the town from South to North. It may turn westward & join the Tunga but until such time the Chikkere tank & the Kadi overflows, it supplies. There is another Kadi which drains the Bamboo Mysore portion of the Malla, joining the Kadi, from Here - Hence the declaration of quantity - of the drain at this point is slightly modified as suggested by Mr Lee the water would flow back into the Tunga & Malla & aggravate the evil - the Chairman's suggestion is an

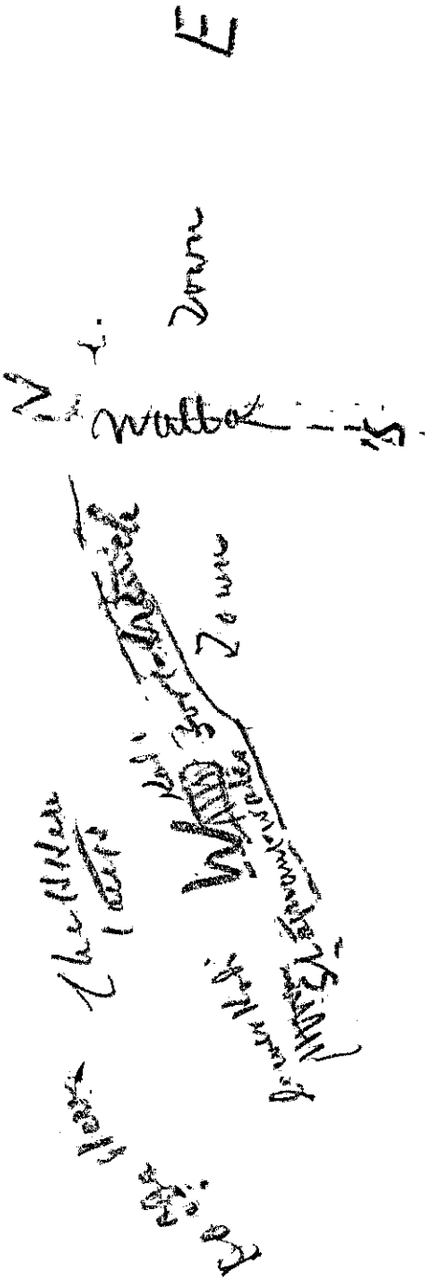

enclosed am. Yet unsigned
of the note sent to Dodge
Kerr & Present Chairman
& agree to the draft - C

11/2/04

In the absence to, we cannot
of certain investments &
agm. Attached a note to
& have the required Land
Valuation & an Investment
The Land & Law, Dacca &
Mercantile Bank - & Insurance
in favour of the Duke Trustees
& the Commissioner of
Lands thereon & ~~for~~ insurance
The Kar called Mudgarden
& to for from the town
& to Kindly necessary the
Executive. Proceedings
are in accordance with
the Board Resolution &
may be Sanctioned.

C.

11/2/04

11/2/04

1582]
11.2.04.

flowing Thro' the Down
and the waste lands
of the Chikkere Mukh.
and request you
to. to.
C. Muppaiyammenger
Esquire.
Personal Assistant
to the 2nd Commissioner.
Bangalore.
—
as be pleased
to place it before
him as early as you
can. I am.
Dear Sir,
Yours obediently
H. Keary
Bridger

38

Hoskote
11th February 1904

To
The Assistant Secretary
with the Dewan.

Dear Sir,

As personally directed yesterday by the 2nd Commissioner I send in a separate cover (no) herewith, a sketch of a portion of the Hoskote Town showing the position of the Wall

Kindly have the accompanying tracing placed in the file of Hoskote Sanitary improvement, which I believe was called for by you last night by the Secretariat.

C.

12/2/04

(3) L1092

8411 / 7-1-02 / 1901 (1)

FROM The Dy Commissioner Bangalore District

To The Secy to the Govt of Mysore Rev Genl Depts

Dated 30th January 1902

Despatched

Received

SECTION Genl

FILE No. L 1092

General No.

No.

Enclosure No. two memos & Copy

Submits for the orders of Govt Copies of two memoranda regarding the sanitary condition of Kolar.

L 7
7.1.02

Submitted with a copy of the current municipal Budget.
Dy 10/1/02

Subscribed for orders.

From the reports of the Asst Commr & the Executive Engineer it is clear that there will be no loss of revenue by breaching the Chikkakere, but it may be necessary to consult the Sanitary Commr or the Sanitary Engineer before any action is taken in the matter.

HB
16/1/1902

Both Officers, & the Tank, should be consulted.

HB
To the 3rd Councillor 7/1

17/2
(429)

Yes discuss
Johnson
21/1

HB
21/1

H.V.K
Dy 21/1

Drafted
HBH
7.3.1.02

8

Bangalore District
Dy. Commissioner's Office
Bangalore 4th January 1952

D.O. No. 754

In: Assembly
reply.

From,

M. S. Narayan Rao Esq
Dy. Commissioner
Bangalore District

To,

H. V. Kanjimbayya Esq M.A.
Secy to the Govt of Mysore
Rev: and Govt Depts

Sir,

I have the honor to submit for the orders of Government Copies of two memoranda, one by myself and the other by Mr Kumaraswami Nayak, Assistant Commissioner regarding the Sanitary Condition of

of Hoshote. 9

2. The town has become notorious as a malarial place and frequent attacks of fever to which the officials working in the Taluk are subject render them incapable of doing their work efficiently and unless some steps are taken to remedy matters, the town runs the risk of being deserted in course of time.

3. The removal of the town to a healthier site would certainly be the best measure in this connection but circumstances are, as stated by the Assistant Commissioner, not favorable to it just now. The

is unfortunately no suitable place in the neighbourhood to which the town could gradually shifted, and the location of the Taluk Head Quarters at any other place involves the construction of public buildings the cost of which is considered not feasible to incur just at present. Nor is this absolutely necessary. If the measures suggested by the Assistant Commissioner are carried out, I have great hopes that the public health of the place will improve the experiment may at any rate be tried and if it does not fulfil the expectations now formed, other measures may be adopted.

Of the measures suggested the demolition

of

Of ruined walls. The prevention of potato Cultivation in which heavy manuring is had recourse to, and the improvement of drainage are points within the sphere of the municipal Board and they will be carried out as expeditiously as possible. The most potent cause of this State of affairs, however, is the existence of the Chikkere tank which it is proposed to breach and for this Steh, I beg to solicit the Sanction of Government. If Government approve of the suggestion, I request that instructions may be given to the officers of the Public Works Dept

for carrying it out. In making the breach Care will have to be taken that the sides of the bund are not scoured away. The bed of the tank will be given out for cultivation as a temporary measure and the grants eventually confirmed after decided that the tank should remain breached for ever. A Copy of the Executive Engineers letter No $\frac{6040}{2090}$ dated 10th December 1901 is also herewith submitted.

I have the honor to be
Sir
Your most obedient servant

Dy. Commissioner,
Bangalore District.

3/a

Memorandum

I inspected the town a few days ago. The town lies in a valley and is surrounded by paddy fields. It has also the accumulation of filth of centuries and it is time it is cleared to a better place. More especially is the case with regard to the Taluk Kacheri the surroundings of which are very filthy and it was in these surroundings that Cholera broke out and is still lingering.

The extension of the town near the Travellers' bungalow is attended by difficulty in the matter of water supply which cannot be tapped at a level convenient for household. The tank water could be pumped up or supplied by "yata" but the town is very low and water is not healthy.

Two alternatives suggest themselves to me. One way to remove the Taluk Head Quarters to a place more healthy and more conveniently situated with regard to water supply,

(Over.

Nothing appeared to be such a place I have not had the opportunity of seeing it. But if the Assistant Commissioner considers the proposal desirable I shall visit the place. A Talok knoheni and quarters for the officials will have to be built there also a Local Fund Dispensary. A new town with the necessary additions to the Talok Head Quarters will then spring up. The place is more central to the Talok than Hoshode.

Another alternative is to prohibit wet cultivation round Hoshode, breach the smaller tank and drain it into the larger tank A few wells may then be sunk in the bed which will supply good healthy drinking water. I am informed that cultivation under the large tank for a length of couple of miles immediately below the large is not constant. Lands are taken up one year cultivated, and again resigned. I do not know what the cause for this is. Probably it is the sparseness of population in the neighbourhood. There is therefore the greater reason for putting a stop to wet cultivation

in

in this locality. The lands may be given for dry cultivation and will yield very good crops of hay for which Hoskote is so remarkable. The town will still, however be subject to the South East winds blowing to it from the lake and the change proposed will not probably be as pronouncedly beneficial as in the other case but the advantage will be of benefiting the whole town and not merely the Govt. Officials. The matter should be reconsidered by the Assistant Commissioner and the Amildar who have a close acquaintance with the locality and their views furnished to me.

Dated 26th July 1901 } (Sd.) M. Shanayan Rao
Deputy Commissioner.

"Copy"

Memorandum

Deputy Commissioner
Bangalore District.

3/6 16

Memo En 6 5 13

The town of Hoskote has, evidently, been in existence for some centuries past. It has, perhaps, never had the disrepute which it has acquired since a few years.

I have affixed this statement to my letter dt. 12/11

2. Why Hoskote town should be so bad, while other towns, such as Kadadi and Ranebennur which are worse off, have nothing to complain, is a thing which I am unable to understand. The people attribute the change to the outbreak of plague which occurred three years ago. Considering the comparative dryness of the soil and the thinness of the population, the town ought to be much more habitable. The present unhealthiness seems, however, to be a mystery.

3. The apparent causes which more or less affect the health of the town are, as far as I can

6 5 1

Dec, as follows

1st 'The situation of the town in a valley.

2nd The close proximity to it of two large tanks

3rd The existence of so many as 37 houses deserted during Plague, which are a source of nuisance and for which, I hear, there are no claimants.

4th The number of ruined walls which are used as so many latrines in the town.

5th The cultivation of potato in and around the town, which attracts heaps of manure to the town, which, when spread over and exposed to sun and rain, renders the atmosphere noxious,

6th Want of proper drainage system which is at present

present, most effective.

7th Using the water of Amani Chikore for drinking purposes.

4. To remove the 1st cause, the town will have to be shifted from its present site altogether which, if accomplished, would remove every difficulty. But, I am afraid, the proposal involves considerable outlay, and does not appear to be feasible under the present state of finances, at a cl. event.

5. The following simple measures may, therefore, be adopted with advantage, which I am sure, will reduce the present unhealthiness of the town to a considerable ext.

6. Of the two tanks, it is the Chikore which is nearer to the town and which has been the chief cause of the malaria. The Amani Dar here is sufficient.

fair off. It may be replaced.
The chikkere which does not
yield more than Rs 3 per-8- per
year, should be uprooted al-
so. The area of the land is
estimated at 33 Square yards and
Rs fourteen. If this is given out
for dry cultivation, the yield
is estimated to be more than
what it is at present. At least
this may be tried for a period
of three or four years, as a
tentative measure.

7. The deserted houses and
ruined walls mentioned in
para 3, clauses 3 and 4, supra
may be demolished, if no
owners are forthcoming and
the sites kept open, unless there
are applicants who can build
houses thereon. In cases in
which there are claimants, the
new Sanitary Rules may be
rigorously enforced to make
them keep their premises neat
and tidy.

8. The next important

measure which I think, deserves to be adopted without much loss of time, is the prohibition of potato cultivation in the immediate neighbourhood of the town. I am given to understand that people have, in several instances, converted their vacant building sites into potato gardens. During my inspection of the town yesterday, I was struck with the quantity of manure which scattered all over the place, for the

manuring these gardens and this manure, I hear, is systematically imported into the town from the surrounding villages. Sanitary education seems to be an equally pressing concern. It does not however require even 1/10 of the manure which is used for the potato crop. I think, in the interest of their own health, the owners of these potato gardens may be easily induced to

them into Fencing, all fields which are un-objectionable

9. The town is, at present, very badly off, as regards sewage drainage. I do not think there are sufficient funds in the Municipality, to meet the cost. The Municipality will have, therefore, to borrow a sum of loan from Government to be repaid by annual instalments and carry out the work.

10. If the Chichester tank were to be breached people shall no longer have recourse to the dirty water which they have hitherto doing for drinking purposes. I believe a sufficient number of fresh water wells already exist to the North and North west of the town, which are, at present, abandoned owing to the easy access to tank water. Some more wells may be sunk at convenient

[illegible] in the chickens [illegible] bed, if need be.

11. Hoskote town [illegible] a-mast a suburb of Bangalore city station, the richer portion of the town inhabitants seem to have left the place for good and settled themselves in Bangalore. The town has, besides, a very small population and there are many numbered vacant sites and buildings which, at present, lie waste. The proposal of extending the town is, therefore, likely to be not attended with success.

Dated 30th Nov: 1907

(Sd) B. S. Hemandasani Naick
Asst. Hoskote Tahsildar

"Copy"
Memorandum by
Deputy Commissioner
Kolar

3/C 23

1901.

1553

From,

B. S. Venkatachariar Esquire

Executive Engineer

Bangalore Division

To,

M. S. Narayana Rao Esq

Dy Commissioner

Bangalore District

Dated Bangalore 10th December 1901

No 6040/2090

Dy Commissioners No 1156 dated 5th Instant forwarding a file of papers on the subject of the unhealthy Condi-

Of Hoskote and requesting to favor with the undersigned's opinion as to the breaching of the small tank.

~~~

Has the honor to inform the Deputy Commissioner having discussed the proposal of breaching the Chikkere with the Amildar of Hoskote on last inspection.

2. The breaching of Chikkere does not affect the general Revenue of the Taluk much nor the large tank below it to a large extent if not wholly the revenue is reimbursed by the Cultivation of land in the bed of Chikkere. The main question of improving the health

of
~~~

Of the town by breaching the tank is a question more properly for the decision of the Medical Officers.

3. The general improvement of the town as regards its drainage and Sewage; removal of objectionable Cultivation and demolishing and levelling old abandoned houses as recommended by the Assistant Commissioner in his memorandum, are in the opinion of the undersigned first items for Consideration. After these are Satisfactorily Carried out, the breaching of Chikkere may be considered if the medical officers think

this step would further improve the town.

(Sd) B. S. Venkatachariar

Executive Engineer
Bangalore Division
Bangalore.

"Copy"

Memorandum

By Commissioner
Bangalore District

27 (4) 25

Read:-

Letter No 754 dated the 4th January 1902 from the Deputy Commissioner Bangalore, Submitting proposals for the improvement of the sanitation of the Hoskote Town.

Order thereon. No 12816-187 L.T.39-1901

Dy 7 January 1902

Copies of the letter read above and of its three enclosures are forwarded to the Senior Surgeon and Sanitary Commissioner with the Govt of Mysore, and the Supg Engr, Sanitary Works, for favour

SECTION Samy I
FILE No 184 of 1900-01
SERIAL No 24

R.L.1239.

24/2/1902
Fwd: as bch: Inspector
& Dr & S.S. Surgeon.

~~Government with the~~
their opinions ~~in the~~
~~matter at an early~~
~~date~~.

JB
30/1/1902
For Secretary
Orig 23/1/02

To
The Senior Surgeon
& Sanitary Commr
with the Govt of Mysore
with copies of letters and enclosures.
The Supg Engr, Sandy Work
thro' the Ch Engr of Mysore
The Dy Commissioner
Bangalore Dist

OFFICE 11951

No. 4535
DATE 12-3-02

FROM

To

H. V. Ranjandappa Esqr. M. A.
M. L.
Secretary to Government
Genl & Rev. Depts
Bangalore

Dated

Despatched

Received

General No.

No.

No. Enclosure No.

Offering opinion re the improvement of the sanitation of Hoskote Town.

SECTION Stamp

FILE No. 84 of 1900-01

S 3

L 1535

5

L.T. 39-01.

L 7
14 3 02

Refer Engr.
Submitted. 17/3/02
receipt of the Sanitary Subdy Engrs opinion, which has not yet been received. Reminded. The last reminder was sent on 6/3/02
S. C. M. 17/3/02
17/3/02

From

Lt. Col. Percy H. Benson M.B, I.M.S,
Senior Surgeon and Sanitary Commissioner
with the Government of Mysore, Bangalore.

To

H. V. Nanjundayya Esq. M.A, M.L,
Secretary to the Government of Mysore
General and Revenue Departments, Bangalore.

No 4535
Dated 12th March 1902

Sir,

I have the honor to acknowledge the receipt of Proceedings of Government & Order thereon No.12816-18/L.F.39-1901, dated 4th February 1902, forwarding copies of letter No.754 dated 4th January 1902, from the Deputy Commissioner of Bangalore as also a note by B.F. Kumarasawmy Naik, Assistant Commissioner, on the unhealthiness of Hoskote and suggestions for dealing with it, also letter No.6040/2090 dated 10th December 1901, from the Executive Engineer Bangalore Division.

2. In these several letters the question of the unhealthiness of the town of Hoskote is fully discussed, and several measures for improving the same are suggested by the Assistant and Deputy Commissioners. At the request of Government, I visited the town of Hoskote on the 5th March in company with Dr. Greenivasa Rao M.D, Government Bacteriologist, and have now the honor to submit to Government my views as to the cause of the present unhealthiness of the place.

3. The Assistant Commissioner attributes the unhealthiness of the place to 7 causes-vide his letter-Of these causes I think we may at once dismiss Nos. 1.3.5. and 7 for the following reasons:-

(1) There are many towns situated in valleys which are not malarious.

(3) There are also many towns having deserted Plague houses and yet no malaria.

(5) There is no evidence extant to show that the cultivation of potatoes is attended with any injurious consequences to health.

(7) As regards this cause, the people of Hoskote have used this tank as a source of water supply for ages and it is only of late that the place has become notoriously unhealthy.

4. Regarding the 2nd cause assigned by the Assistant Commissioner the mere fact of the town being in close proximity to two large tanks does not per S.E necessarily make it malarious. If however the town is nearly on the same level, then there is the liability for the lower portions to become immersed, and the various hollows and depressions filled with water and thus form ideal breeding places for the malarial mosquito and it is only in this way, that close proximity to two tanks can in my opinion lead to an outbreak of malaria.

5. Regarding cause (4) Ruined walls, enclosing as they do, small areas of ground which are readily availed of as latrines, must necessarily act injuriously on the public health.

6. No 6 want of proper drainage is also an important factor in the causation of malaria, as anything which tends to the stagnation of water will thereby form a suitable nidus for the propagation of the anopheles.

7. The remedies suggested by the Assistant Commissioner supported by the Deputy Commissioner are in my opinion not only too heroic but also too expensive.

They are:-

(1) The removal of the town to a healthier site. This in my opinion is not only too costly but also quite unnecessary.

(2) The breaching of the Amani Chikkere tank-another heroic-remedy until it is definitely proved that the water of this tank is injurious to public health it should not be breached.

3rd

3rd As regards the prohibition of potato cultivation which the Assistant Commissioner considers " ought to be adopted without loss of time ". I have already stated that there is no evidence whatever that this exerts any deleterious influence on public health.

8. Of the minor remedies suggested by the Assistant Commissioner e.g. demolition of deserted houses and ruined walls &c, I am quite in accord. Sewage drains are in my opinion quite unnecessary.

9. The cause of the unhealthiness is most undoubtedly due to malarial fever, as from a reference to the Hospital records, I find that from March 1901 to end of February 1902 there were no less than 2763 cases of malarial fever treated in the Hospital giving a monthly average of 230.

Months	Admission
March 1901	131
April "	236
May "	255
June "	324
July "	186
August "	159
September	280
October "	284
November "	280
December "	215
January 02	166
February "	247
Total	2763

10. The yearly mortality which in 1891-2 when the population of the town was close on 5000, was only 46 per annum, has in the last 10 years risen to 116, out of a decreased population of nearly 1000. Mr.Lee the Sanitary Engineer in his report on unhealthiness of the town has in my opinion taken the right view of the case, when attributes it to the presence of anopheles. He says " all over the town there are depressions or pits, from which earth for raising walls of the houses were

excavated

excavated. Rain water first drains into these pits, and the over-flow is carried away by surface ditches and nullahs. The Outer North trench of the ruined Fort is a marshy swamp with rank vegetation. The former afford ample breeding grounds during the cold weather when fever is at its height, and the latter is a typical malarial ground all the year round".

11 Dr. Sreenivasa Rao and myself carefully examined all the pools we could find, for the larvae of the malarial mosquito , but we were unable to find one, though each specimen of water contained larvae of the ordinary Culex Mosquito which is said to be harmless.

12. At the time of our visit there was no water in any of the pits or depressions, and the water in the north trench of the Fort was very low. It is just possible that this time of the year is not the time for breeding, and it will be necessary to revisit the place after the first rains in May and June, and see if any of these pits or depressions when full of water, do, or do not, contain the larvae of the anopheles.Should they be then found in abundance, we may I think safely infer that the cause is due to mosquitoes. The question may I think fairly be asked. How is it that malaria still prevails although no anopheles larvae were found ?. The answer to this is that though we failed to find any of the larvae of the anopheles, we cannot say for certain that the full grown mosquito is absent.

13. The Hospital Assistant is being supplied with a net and has been requested to catch as many mosquitoes as he can in the various houses and forward them to Dr.Sreenivasa Rao, when,I have no doubt many anopheles will be found which will be sufficient to account for the continued prevalence of malaria as they are able to convey the infection by drawing blood from a fever case, and injecting it into a healthy person.

14. The suggestions made by Mr.Standish Lee for improving the health of the town are, in my opinion just what are required, and at the same time very inexpensive. I cannot however

agree

agree with him that it is necessary to remove all houses round the Taluk Cutcherry for a space of 200 yards as the Cutcherry stands in a large compound having two sides free and open and any good which might accrue from pulling down so many houses, would not be commensurate with the expense incurred or the trouble and annoyance it would give rise to.

15. I have therefore the honor to recommend that a sum of Rs.2000/- as suggested by the Sanitary Engineer be sanctioned and the work put in hand at an early date.

I have the honor to be,

Sir,

Your most obedient servant

Lt.Col.I.M.S.

Senior Surgeon and Sanitary Commissioner

Mysore Government.

35

OFFICE No. 1582 17-3-1902
12808
20 MAR 2
Encl. to the
Secretary to Government
Revenue & Genl Department
with reference to proceedings
No 12816-19 of 14th Instant.
L.D. 39-1901

Army
FILE No. FD 40 of 1900-01
SERIAL No. 4

To the Secretary
Public Works Dept

II. Before adopting the drastic measure of removing the Village or the Salsette Hatcheries, and breaching the Chuckalem Lake which supplies the town with drinking water, Undersigned would suggest that the last proposals vide para X or some of them may be tried. They will all be beneficial except item nos 7 & 8, the object of which is not apparent.

Jas Campbell Colonel,
Chief Engineer & Surveyor

Enclosure. 2 Drawings

Bombay
17-3-02

Q.19.

19-3-02

A. S. ch for note. dtd 26/3/02

Rec'd 29/3

SECRETARY'S OFFICE
Regd. No. 132-180
From 13 MAR. 1902
Mysore Govt. Dept.

6/a

To Lieut: Colonel Campbell
Chief Engineer

Dated Bangalore 20th February 1902

Despatched 13/3/02 J Paterson

Received

General No. 532
No. 100

Enclosure No. 2 Statement

Chief Engineer's No. 556 dated 5/3/02 communicating Secretariat No: 1251C-1/1 dated 28/2/02 with Statement showing the Estimate for the improvement of the Kolar Fort.

Friendly or either preventing the town to a healthier Site, or Shifting the Sanit area further from the town. The reasons assigned are that the

Para two of Order No 454 of 4th January 1902 issued by Commissioner. —

Town has become notorious as a malarial, over and frequent attacks of fever xxxxxxxx the same specialxxxxxxxx of doing their work". The town lies in a valley and is surrounded by paddy fields, it has also the accumulations of filth of centuries and it is time that it is shifted to a better place. More especially as the Civil with regard to the Sanit Station, the surrounding country was filthy."

x "The South West winds blowing to it from the Sea."

"11 Other Causes to be considered in their Statements, for

Means by Deputy Commissioner passed over and down. —

instance the want

of the Sewage - Disposal is occasional

a chain of 3 Tanks, while the Village is situated on gently rising ground above the Centre tank (Vide tracing no I). There are also no paddy fields but "Cheyam at" (wall irrigated lands). nor do these surround the town. They form a narrow strip along its northern boundary measuring only 43 acres, while the town extends over 124 acres. (Vide tracing no II).

There are no accumulations of filth, - "much less" of carcasses. The Soil owing to sparseness of population, Viz, 998 houses with 3770 Souls Scattered over 124 acres, - is clean and practically free from Organic Contamination.

The filthy surroundings of the Tank Thetchary consist of about 30 mostly deserted huts Scattered over the ground for a distance of about 100 yards from the buildings. The removal of which will be a small fraction of the cost of removing the Tank Head Quarters. As regards the South west wind blowing on to it, from the tank. Tracing no II

Shows

shows that it cannot blow from the tanks over the town.

III The proposals to remove the present locality is, however, not pressed, on account of the cost and the financial condition of the Government. The Deputy Commissioner is also of opinion that neither step is "absolutely necessary, if the measures suggested by the Assistant Commissioner are carried out" and recommends that "the experiment may at any rate be tried" and if not successful "other measures may be adopted".

IV These experimental measures are:—

(a) The demolition of ruined walls.
(b) The prevention of potato cultivation.
(c) The Improvement of Sewage & Drainage.
(d) The bricking of Chickatera Tank.

V Potato cultivation is proposed to be stopped because it "attracts heaps of manure to the Town, which when spread over and exposed to Sun and rain, renders the atmosphere noxious". The manure used is what

Para 3 clause 5 of Assistant Commissioner's memo —

to

is known as "Farm Yards, that is, collections made from cattle Sheds. The report states that it is carted from adjoining Villages to the fields and ploughed in. The atmosphere of these fields was perfectly innocuous and the Soil clean, with no traces of offensive dressing of manure. To declare such clean cultivation injurious or not, to health is, however, the province of the Senior Surgeon.

VI In this connection it must be prominently brought to notice that Hoshoti has no industry and no trade. The only Source of earning a moderate Competence is the cultivation of Potatoes and Hay. It is questionable policy to abolish one of the Chief means of Sustaining life as "an Experiment" to improve health.

VII The existing Drains are free of Sewage and the road Side ditches have no indication of waste water. The object of Sewage Drains in Such a Scattered Town is not apparent.

VIII

VIII The breaching of the Chickara tank is recommended by the Assistant Commissioner on the ground of the use of its water for domestic purposes being unhealthy while the Chemical Analyzers report is as under:—

Total hardness:- 10 grs per gallon.
Permanent:- 9.8 per gallon.
Removable:- .3 per gallon.
Chlorine:- 3.4 per gallon.
X —— - nil ——
X —— 1.18 ——

A fairly good water.
Sd/ F. A. Bowen.
Chemical Examiner.
29 August 95

The Deputy Commissioner attaches great importance to this measure for the Station. "The most potent cause of this state of affairs" (i.e the fever stricken condition of the Town) "however, is the existence of the Chickara Tank" but does not give his authority nor shows how the breaching of the Tank is to improve the health of the town.

IX Having thus shown that most of the grounds adduced for the steps proposed for improving the Sanitation of Hosakote is untenable, break down when critically

Examined

recommend the following proposals are submitted subject to approval by the Sanitary Commissioner for favorable consideration of Government. The present enquiry is based on Fever of a malaria type being endemic at Hoshiarpur. The accepted theory of malaria is that it is chiefly spread by anopheles and that this species of mosquito breeds in marshy ground and stagnant shallow pools of fresh water. The cause must, therefore, be traced to these conditions. All over the town there are depressions or pits from which earth for raising the walls of the houses were excavated - Rain water first drains into these pits and the over flow is carried away by surface ditches and nullahs. The outer north trench of the ruined Fort is a marshy swamp with rank vegetation. The former afford ample breeding grounds during the cold weather, when the fever is at its height; and the latter is a typical malarious

malaria
ground all the year round.

Anopheles are not credited as ~
depositing their larvae in deep water and,
therefore, Chickera Tank is not a contributory
to malaria and Simia, its water is pronounced
"A fairly good water" it has no soil bearing
towards the town, while it supplies drinking
water for 9 months in the year, and improves
the springs in the walls which supply water
for the remaining 3 months. The breaching
of it will, therefore, be a calamity and
should not be sanctioned.

X The works requiring execution,
therefore, appear to be the following:—

(1) The demolition of the old ruined walls
and the earth used for filling up
hollows in the Town.

(2) The improvement of the surface flood
water drainage.

(3) The filling in of the North Fort ditch
to the extent of about 3 feet
by earth from the ruined ramparts
close to it; this will not prevent
its acting as a feeder channel
to Dodkara. —

(4)

(4) The giving out of the site of the Fort, 20 acres, for cultivation to prevent its use as a latrine, and the growth of noxious Vegetation.

(5) The removal of houses all round the Lake Hatcheries for a space of about 200 feet.

(6) The custody and conservancy of the 99 Plague deserted houses.

(7) The defining of the Town limits to an area Commensurate with the population. 3770 Souls.

(8) The prevention of houses outside such limits.

(9) The gradual Shifting of the 50 houses below Kalagama Tagalara pat. which lies low and is damp, higher up the rising ground.

XI These works are inexpensive, but still beyond the means of the Municipality whose income is but 2,043 Rupees. The Town is gradually getting depopulated.

The

The census of 1891, returned 4917 inhabitants while the results of 1901 show only 3770.

XII A special grant of 2000 Rupees is, therefore, strongly recommended for carrying out the very necessary works indicated above.

Dated Bangalore - 27 February 1902

Bhumthavanamaya K.
for
S.

13 3/02

Scheme No: 2

Sanitary Improvements

Chick kere

ಹೊಸಕೋಟೆ

HOSKOTE VILLAGE

SITE



Scale 1 inch = 1 furlong

Superintending Engineer

Sanitary works

28-2-02

En 65

TRACING No. 1

Hoskote Sanitary Improvements

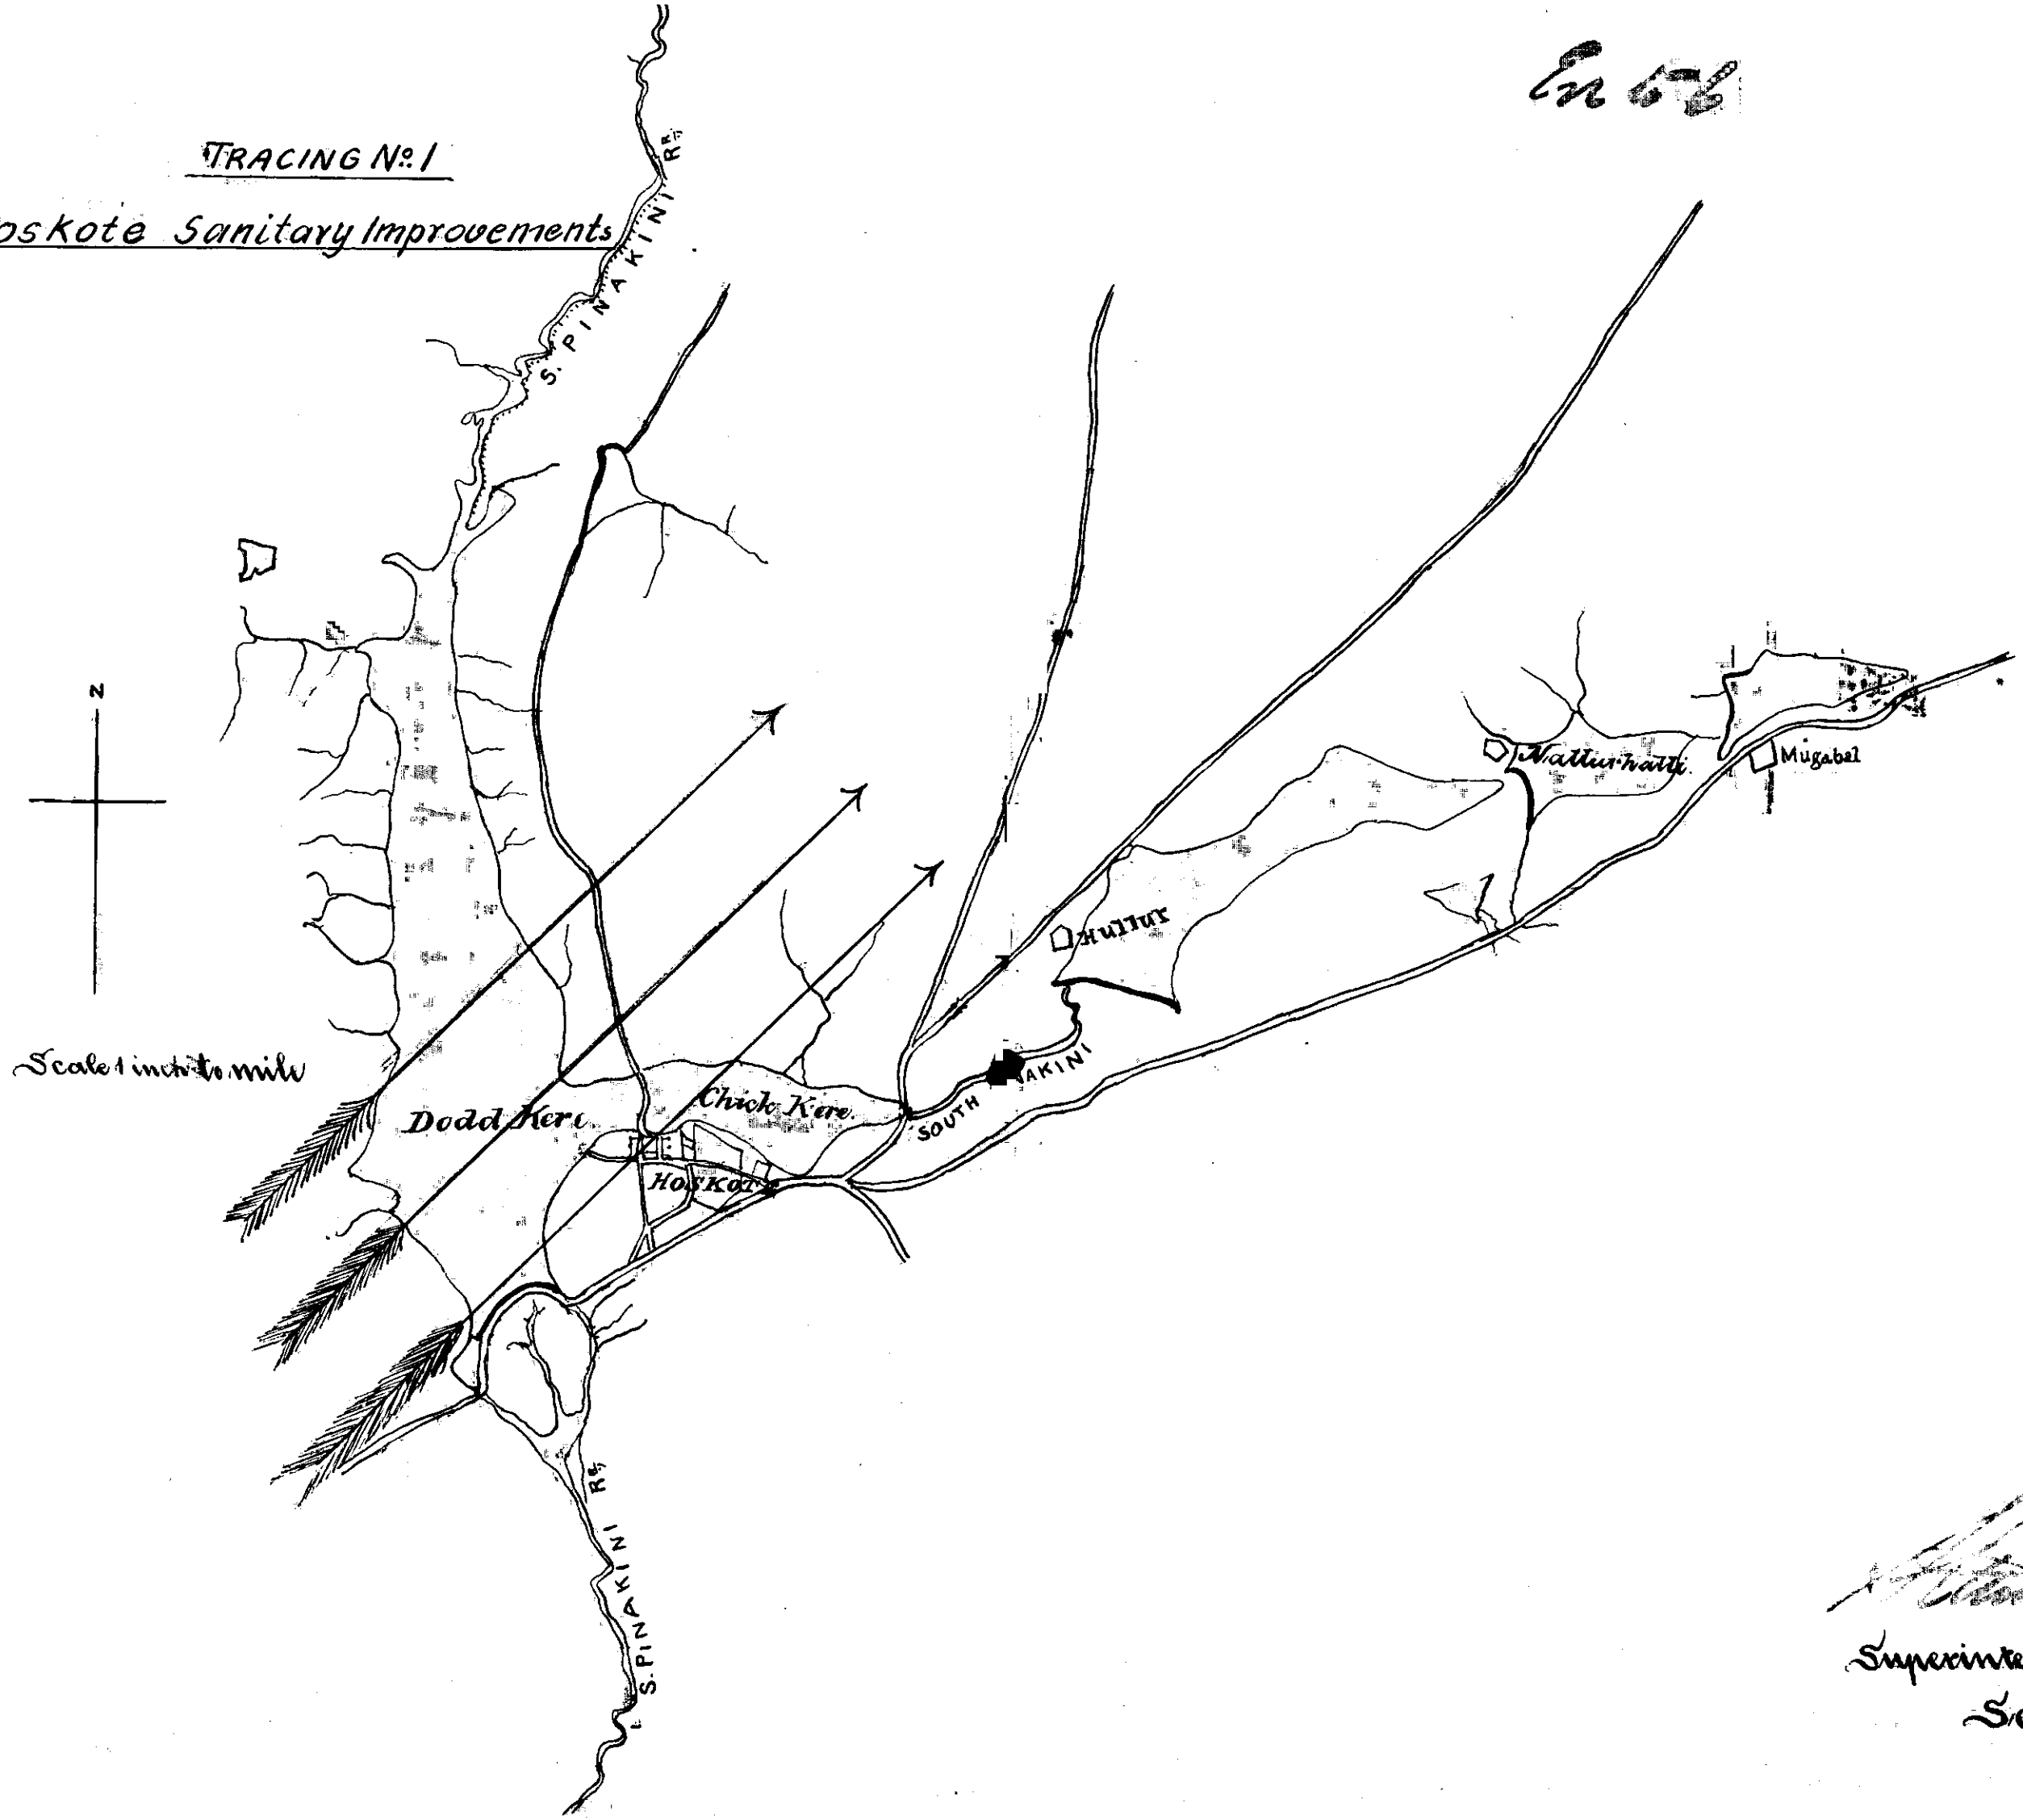

Superintending Engineer
Sanitary Works.

(7)

Read:-

(Here enter the following letter communications)

1. Letter No 754 d the 4th January 1902 from the Deputy Comr, Bangalore Distt [with enclosures].
2. ~~Letter~~ No 532/100 d the ~~12th~~ 26th Feby 1902 from the Supg Engr, Sanry Works, with the endorsement of the Chief Engr thereon No 1582 d 17.3.02.
3. Letter No 4535 d ~~12.3.02~~ 12th March 1902 from the Senior Surgeon & Sanry Comr with the Govt of Mysore.

Sec Sanry
File 194 of 1900-01

Order thereon No 1648-52 d 7.39-01

26/7/02 Encl to P.Bl. Distt

The Senior Surgeon and Sanitary Commissioner,

and

R.A. 186

Re-d - Copies sent to all.

and the Supg Engineer of Sanitary Works are of opinion that the unhealthiness of the Hoskote Town is due to the presence of Malarial Mosquito and not to the situation of the town in a valley and close to two tanks nor to the cultivation of potatoes around it.

2. The measures for the improvement of the Sanitation of this town suggested by the Dy Comr and Asst Comr Mr B. J. Kumarasamy Naik, are considered by the Senior Surgeon and Sanitary Comr, and the Supg Engr of Sanitary Works as too expensive — except the demolition of deserted houses and ruined walls,

~~technical and financial grounds~~. The breaching of the Amani Chik Kere Considered ~~unnecessary~~ unnecessary & is ~~decried~~ on the ground ~~and~~ undesirable as ~~that~~ it supplies a fairly good drinking water to the town for about nine months in the year.

3. In para X of ~~the~~ the Surg Engrs letter read above Mr Lee ~~proposes~~ recommends certain measures for early adoption as ~~a~~ practical and inexpensive. Of these measures, ~~Dr Beaton~~ the S.V. Surg. does not approve of the removal of ~~the~~ all houses round the Jaluk Cutcherry, for a space of 200 yards, ~~as the Cat~~ on the ground that the Cutcherry stands in a large compound having

two sides free and open.

4. Government are pleased to ~~order the carrying out at once~~ direct that the improvements suggested by Mr Lee and concurred in by the Sr Surgn and Secy Comrs be carried out as early as practicable.

5. Mr Lee estimates the cost of these works at Rs 20,000 and recommends the grant of this amount to the Municipality ~~for carrying out the measures recommended by him~~. The closing balance of ~~the Municipality~~ which for the current year is estimated at Rs 14,78

Out of this the Municipality may utilize Rs 1000/- for these works and an equal sum viz Rs 1000 will be paid from Provincial funds as a Grant in aid to the Municipality.

6. The Senior Surgeon and Sanitary Commissioner is requested to report the result of further test by inoculation of mice breeding at the Horticultural Gardens

Dharwar's ltr dtd 19.7.02

23/7

Secretary

23/7/1902

ltr dtd 22/7/02

To. The Dy Comr and Presd of the Municipality at the Bangalore Dist.
The Comptr, Govt of Mysore
The Sr Surgn & Sanitary Commr with the Govt of Mysore
The Chief Engr of Mysore.
The Supdg Engr Sanitary Works thro' the Chief Engr of Mysore

X. Submitted.

The Supdg Engr recommended a Spl Grant of Rs 2000 to the Municipality. The III Councillor in his note to the Dharwar stated "X X (the municipal grant) supplemented by a Grant or loan of an equal amount by Govt." The Dharwar in his order simply says "Sanctioned". In the draft the Provincial grant is stated to be a subject to approval loan to the Municipality & not a repayable loan

dtd 22/7/02

Pmt

53 (8) 2571.

5 SE 1902

190

From

381

To

M. V. Nanjundayya Esqr.
M. A, M. L.
Secy to Govt
Genl & Rev: Depts
Bangalore

Dated 23/8/02

Despatched

Received

General No.

No.

Enclosure No. 1.

Subject

Forwarding the Inspection Report of the Chemical Examiner & Bacteriologist re Musquito breeding at the Hoskote Town.

SECTION

FILE No. 161 of 900-01

SER

G-39
S.G.V.K.
2.9.

J.G.V.K
Minute Contd & Draft Subd 9.9.02
10/9
9.9.02

From

Lt. Col. Percy H. Benson M.B, I.M.S,

Senior Surgeon and Sanitary Commissioner

with the Government of Mysore, Bangalore

To

H. V. Nanjundayya Esq. M.A, M.L,

Secretary to the Government of Mysore

General and Revenue Departments, Bangalo

No 73

Dated 3rd September 1902

Sir,

With reference to the Proceedings of Government and Order thereon No.1648-52/L.R.39-01 dated 26th July 1902, I have the honor to forward for information the accompanying copy of letter No.91 dated 30th August 1902 received from the Chemical Examiner and Bacteriologist to the Government of Mysore.

I have the honor to be,

Sir,

Your most obedient servant

P Benjamin Benson

Lt.Col.I.M.S.

Senior Surgeon and Sanitary Commission

Mysore Government.

The Chemical Laboratory and
Bacteriological Institute

No. 91 Bangalore 30th August 1902.

From

M.Srinivasa Rao Esq. M.A, M.D, C.M, & B. S. C (Edin)
Chemical Examiner and Bacteriologist
to the Government of Mysore, Bangalore.

To

Lt.Col. P.W. Benson M.B, I.M.S,
Senior Surgeon and Sanitary Commissioner
with the Government of Mysore, Bangalore

Sir,

With reference to your endorsement No.350 dated 1-8-02 on Proceedings of Government No.1648-52 L.F.39-1901 dated 26-7-02, I have the honor to state that of the 70 Mosquitoes examined in March last only 6 were anopheles, the rest being of the Culex variety. As at that time no anopheles larvae were detected, I went to Hoskote again this month and inspected the place thoroughly. Numerous pits were noticed almost around every house but they were all dry owing to deficient rainfall. All the stagnant pools of water about the edge of the AmaniChikkere were examined but no anopheles larvae were found in any of them. From enquiries made, I learnt that the number of Mosquitoes this season was much less than in previous years and that there were fewer cases of Malarial fever. It remains to be seen how the health of the place would be affected sometime after the heavy rains and I would propose taking a trip again there to see

whether

whether the Mosquitoes breed in large numbers.

I have &c

/ Signed / M.Srinivasa Rao

Chemical Examiner & Bacterilogist
to the Government of Mysore.

" C O P Y "

Lt.Col.I.M.S.

Senior Surgeon & Sany:Commissioner

Mysore Government.

5

(9)

Read :- (Sl 7)

Letter No. 4.73/d, the 3rd September 1902 from the Senior Surgeon and Sanitary Commissioner with the Govt of Mysore submitting, with reference to Govt Progs No 1648-52 (Sl 6) & 4Z.39-01 the 26th July 1902, letter No 91 & the 30th Augt 1902 from Dr Srinivasa Rao stating that he went to Hoskote in August 1902 and examined the pits near houses and the stagnant pools of water about the edge of the Avani-chikkere but no anopheles larvae were found in any of them, and that he would again go to Hoskote sometime after the heavy rains to see how the health of the place would be affected and whether the mosquitoes breed in

that the number of mosquitoes this season was much less than in previous years, and that there were fewer cases of malarial fever,

in large numbers.

Order thereon - No 4455
L.F. 39-07

R.L. 508

SECTION— Surg.
FILE NO. 104 of 1902-1
SER 9

23/9/02

Recorded with a request that the Senior Surgeon will report the result of Dr Srini Vasa Rao's further investigation ~~may be~~ for the information of ~~reported to~~ Government.

From S. Surgeon
No 312 dt 27/11/03
L1207

JB
22/9/1902
do Secretary
JB
22/9/1902
Surg. 11/9/02

To.
The Sr Surgn & Surg Comr
with the Govt of Mysore.

L2475

No: 2058

Enc. &c. and ...

(10)

OFFICE OF THE REV. COMR. IN MYSORE,
Bangalore, 21st *April* 1903

FROM

V. P. MADHAVA-RAO, ESQ., C.I.E.,
Revenue Commissioner in Mysore.

To

H. V. NANJUNDAYYA, ESQ., M.A., M.L.,
Secretary to the Govt. of H. H. the Maharaja of Mysore,
General and Revenue Depts.

SECTT. 24 APR 1903
FILE NO. 18 1 3
SER. 78

SIR,

I have the honor to forward herewith for the information of Government, copy of letter No.D.1066 dated 1st April 1903 from the Deputy Commissioner and President of the Municipalities, Bangalore District, submitting ex--tracts from his Notes of Inspection of the Hoskote Munici--pality and of the Municipal and District Fund Accounts of the Hoskote Taluk, and to state that the remarks made by the President on the conduct of the Amildar of the Taluk have been noted in this Office.

I have the honor to be,

Sir,

Your most obedient servant,

for Revenue Commissioner.

60

10/a

Bangalore District,

D.No.1066/En.2. En 68 Deputy Commissioner's Office.

Bangalore, 1st April 1903.

From

H.H. Sparkes, Esq.,

Deputy Commissioner, and President of Munici-
-palities, Bangalore District

To

V.P. Madhava Rao, Esq., C.I.E.,

Revenue Commissioner in Mysore.

Sir,

I have the honor to submit herewith for your information extract of para 8 from the notes of the Inspec-
-tion of the Municipal and District Fund Accounts of the Hoskote Taluk, as well as copy of my notes of Inspection, relating to the improvements of the Hoskote Municipality, which I inspected on the 30th March 1903.

I have &c.,

Signed. H.H. Sparkes,
Dy.Comr. & President
of Municipalities.

Copy

For Revenue Commissioner.

KS

10

Notes of Inspection on the Hoskote Municipality.

En 678

I inspected the town in company with the Amildar this morning: some months ago Government sanctioned the expenditure of Rs. 2,000 for the draining of the town, fil-ling in pits, &c., in which water was allowed to stand. From time to time I have visited the town and personally instructed the Amildar what to do, but after all this time, I find that very little has been done and that only just round the Taluk Cutcherry and in the vicinity of the Amil-dar's dwelling house, the Amildar giving as an excuse, the outbreak of plague and the failure of private owners to attend to his orders to fill up the pits in their hittals, &c I cannot accept this excuse and can only put down the non performance of the work to the apathy displayed by the Amildar. It was explained to him formerly that he should begin work at the top of the town by filling in the old pits or draining them, and in case of neither of these be-ing practicable, to divert any water from entering them, this has not been carried out, and instead I noticed that fresh pits had been allowed to be dug on culturable land for the purpose of brick-making and against the Revenue Rules as it spoils the land for cultivation. The Amildar will report at once as to how this was allowed to occur, he is also directed to push on with the sanitation work at once and submit a weekly report of what is being done.

Signed. H.H. Sparkes,
President of Municipalities
in the Bangalore Distt.

Copy

For Revenue Commissioner.

KJ

10

En 6 P C

Notes on the inspection of the Municipal and District Fund Accounts in the Hoskote Taluk.

x x x x x x x

8. Some months ago Government sanctioned a sum of Rs.2,000 for draining and levelling off pits in the town. On more than one occasion, the Amildar has been personally shown what to do and urged to do it, but in spite of this very little progress has been made and only some Rs. 300 spent, this is most deplorable and shows the apathy dis-played by the Amildar and which fact will be brought to the notice of Government; the Amildar is now ordered to push on the work as fast as possible. The Work Inspector appears to be thoroughly incompetent and his services will be dispensed with at an early date.

Signed. H.H. Sparkes,
Municipal President,
Bangalore District.

Copy

For Revenue Commissioner.

VG

enb.

Petition to be returned being unstamped & un accompanied by the order applied for

16-5-03 L2138 (Municipal)

16/5/03
(as 19/5).

dy 19/5/03
Engr
1049 20-5-03
9

OFFICE OF THE
Regd 12403.
18 MAY 1903
DEPT.

(11) L2137

1902-03

No. 2706

Name of Petitioner Nanjundaraja and other inhabitants

Village Kasaba Hosakote

Taluk Hosakote

District Bangalore

Date of Arzi 8-5-03

Date of Receipt 11

Date of Disposal

No. of Enclosure Nil.

ABSTRACT

Submit that the "Kunte" (small tank) at Hosakote is situated in a good locality and supplies healthy water for people and cattle; that except this "Kunte" there is no other source of water within half a mile that no medical officer has examined and pronounced it to

be unhealthy located.

That such being the case the Dy. Comm. has ordered to breach this "Kumle" and the work is begun; and that if this "Kumle" is breached the people and cattle will be put to great difficulty for water.

Pray therefore that early orders may be passed setting aside the Dy Comm's order and stopping work of breaching the ~~Canal~~ or "Kumle".

15/5/03

65

(12)

Official Memorandum

The accompanying Appeal Petition Registered as no 2706 dy 8-5-03, received at the Dewan's office from — Nanjundayya and others of the Hosakote Town complaining that the Dy Comr ~~with a view to improve the population of the town~~ has ordered the breaching of Kunte that is situated in a good locality and supplies good drinking water for men and cattle; and praying for early orders for ~~that may be passed~~ stopping the work ~~of breaching the Koote~~, is forwarded to the Dy Comr. Bangalore dist for early report ~~on the matter~~.

28/5/03
For Secretary to Govt

SECTION: Revenue
No 1042 dy 1900-01
SER 10

R.L. 2126

No 17077 dy 11/6/03
L.739-01 dy 11/6/03.

Re: the petition

66 (13) GL: 1335-7
13-6-03.

1902/03 L2327

From The Municipal President
Bangalore District

To The Secretary to the Govt
of Mysore
Revenue Department

Dated 11th June 1903

Despatched 12th June 1903

Received

General No.

D No. 1405

Enclosure No One.

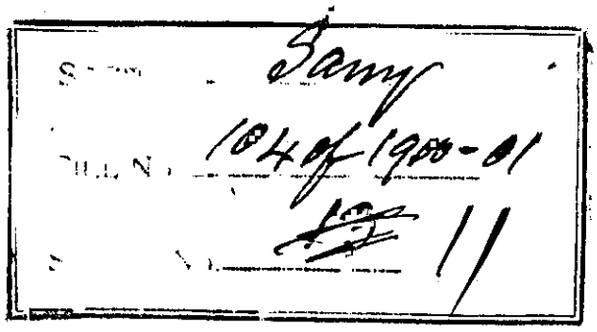

Secy's official memo No 17077
L739-01
of 1st June 1903.

Submits report on the petition of Ramjundayya and others of the Hoskote Town regarding the breaching of a Kunte.

L 7
13. 6. 03
Draft 11/7/03 Sec. 9.
13/6/03

Bangalore District 67

Municipal President's Office.

Bangalore 11th June 1903

DR No 1405
Sundries.

From,

H. St. Charles Esqr
Municipal President
Bangalore District

To,

H. V. Ranjmudayya Esqr Avl
Secy to the Govt of Mysore
Rev and Genl Depts.

Sir,

With reference to your Official memo No 17077/1739-01 of the 1st Instant, forwarding for report a petition from Ranjmudayya and others of the Hoskote Town, regarding the breaching of a Kunte te, I have the honor to State that this is a part of the Scheme Suggested

Suggested by the Senior Surgeon and the Sanitary Engineer for improving the Sanitation of the Stoke Town, and if the scheme is to be effectually carried out this Kiute must either be drained or filled in. The draining is not necessary, as it is found that all water now flowing into the Kundah can be diverted and the hollow hereafter filled up; no loss will therefore accrue to the petitioners.

2. The appeal petition is herewith returned.

I have the honor to be,

Sir,

Your most obedient Servant,

[signature]

President

69

13
a

By hand 11.5.03

MYSORE DEWAN'S OFFICE
PETITION DEPARTMENT
REG'D. NO 2706
DATE 11-5-1903

2706

(5) ಈ ಕರಾರಿಗೆ ಸಂಬಂಧಿಸಿದಂತೆ ಯಾವುದೇ ವ್ಯಾಜ್ಯಗಳು ಉಂಟಾದಲ್ಲಿ ಅವುಗಳನ್ನು ಬೆಂಗಳೂರಿನ ನ್ಯಾಯಾಲಯಗಳಲ್ಲಿ ಮಾತ್ರ ವಿಚಾರಣೆಗೆ ತೆಗೆದುಕೊಳ್ಳಲಾಗುವುದು. ಈ ಕರಾರಿನ ಬಗ್ಗೆ ಯಾವುದೇ ಸಂಶಯಗಳು ಉಂಟಾದಲ್ಲಿ ಅವುಗಳನ್ನು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ನಿರ್ಣಯಿಸಿ ಅವರ ನಿರ್ಣಯವೇ ಅಂತಿಮವಾಗಿರುವುದು. ಈ ಕರಾರಿನ ಬಗ್ಗೆ ಯಾವುದೇ ಸಂಶಯಗಳು ಉಂಟಾದಲ್ಲಿ ಅವುಗಳನ್ನು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ನಿರ್ಣಯಿಸಿ ಅವರ ನಿರ್ಣಯವೇ ಅಂತಿಮವಾಗಿರುವುದು. ಈ ಕರಾರಿನ ಬಗ್ಗೆ ಯಾವುದೇ ಸಂಶಯಗಳು ಉಂಟಾದಲ್ಲಿ ಅವುಗಳನ್ನು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ನಿರ್ಣಯಿಸಿ ಅವರ ನಿರ್ಣಯವೇ ಅಂತಿಮವಾಗಿರುವುದು. ಈ ಕರಾರಿನ ಬಗ್ಗೆ ಯಾವುದೇ ಸಂಶಯಗಳು ಉಂಟಾದಲ್ಲಿ ಅವುಗಳನ್ನು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ನಿರ್ಣಯಿಸಿ ಅವರ ನಿರ್ಣಯವೇ ಅಂತಿಮವಾಗಿರುವುದು. ಈ ಕರಾರಿನ ಬಗ್ಗೆ ಯಾವುದೇ ಸಂಶಯಗಳು ಉಂಟಾದಲ್ಲಿ ಅವುಗಳನ್ನು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ನಿರ್ಣಯಿಸಿ ಅವರ ನಿರ್ಣಯವೇ ಅಂತಿಮವಾಗಿರುವುದು. ಈ ಕರಾರಿನ ಬಗ್ಗೆ ಯಾವುದೇ ಸಂಶಯಗಳು ಉಂಟಾದಲ್ಲಿ ಅವುಗಳನ್ನು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ನಿರ್ಣಯಿಸಿ ಅವರ ನಿರ್ಣಯವೇ ಅಂತಿಮವಾಗಿರುವುದು.

(6) ಆ ಪತ್ರಿಕೆಗಳಲ್ಲಿ ಪ್ರಕಟವಾಗುವ ಜಾಹೀರಾತುಗಳಲ್ಲಿ ಕಾರ್ಖಾನೆಯ ಹೆಸರನ್ನು ಉಲ್ಲೇಖಿಸಿ ಜಾಹೀರಾತುಗಳನ್ನು ಪ್ರಕಟಿಸಲು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ಒಪ್ಪಿಗೆ ನೀಡಿರಬೇಕು. ಆ ಜಾಹೀರಾತುಗಳಲ್ಲಿ ಕಾರ್ಖಾನೆಯ ಹೆಸರನ್ನು ಉಲ್ಲೇಖಿಸಿ ಜಾಹೀರಾತುಗಳನ್ನು ಪ್ರಕಟಿಸಲು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ಒಪ್ಪಿಗೆ ನೀಡಿರಬೇಕು. ಆ ಜಾಹೀರಾತುಗಳಲ್ಲಿ ಕಾರ್ಖಾನೆಯ ಹೆಸರನ್ನು ಉಲ್ಲೇಖಿಸಿ ಜಾಹೀರಾತುಗಳನ್ನು ಪ್ರಕಟಿಸಲು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ಒಪ್ಪಿಗೆ ನೀಡಿರಬೇಕು. ಆ ಜಾಹೀರಾತುಗಳಲ್ಲಿ ಕಾರ್ಖಾನೆಯ ಹೆಸರನ್ನು ಉಲ್ಲೇಖಿಸಿ ಜಾಹೀರಾತುಗಳನ್ನು ಪ್ರಕಟಿಸಲು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ಒಪ್ಪಿಗೆ ನೀಡಿರಬೇಕು. ಆ ಜಾಹೀರಾತುಗಳಲ್ಲಿ ಕಾರ್ಖಾನೆಯ ಹೆಸರನ್ನು ಉಲ್ಲೇಖಿಸಿ ಜಾಹೀರಾತುಗಳನ್ನು ಪ್ರಕಟಿಸಲು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ಒಪ್ಪಿಗೆ ನೀಡಿರಬೇಕು. ಆ ಜಾಹೀರಾತುಗಳಲ್ಲಿ ಕಾರ್ಖಾನೆಯ ಹೆಸರನ್ನು ಉಲ್ಲೇಖಿಸಿ ಜಾಹೀರಾತುಗಳನ್ನು ಪ್ರಕಟಿಸಲು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ಒಪ್ಪಿಗೆ ನೀಡಿರಬೇಕು.

(7) ನಿಷ್ಕೃಷ್ಟಾಂಶ ಯಾವುದೇ ಸಂಶಯವಿದ್ದಲ್ಲಿ ಅಥವಾ ಇಲ್ಲಿನ ನಿಯಮಗಳಲ್ಲಿ ಇಲ್ಲದಂತಹ ವಿಷಯಗಳು ಉದ್ಭವಿಸಿದಲ್ಲಿ ಅವುಗಳನ್ನು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ಪರಿಶೀಲಿಸಿ ಅವರು ಕೊಡುವ ನಿರ್ಣಯವೇ ಅಂತಿಮವಾಗಿರುವುದು.

(8) ಈ ಕರಾರಿನ ವಿಷಯಕ್ಕೆ ಸಂಬಂಧಿಸಿದಂತೆ ಯಾವುದೇ ಸಂಶಯಗಳು ಉಂಟಾದಲ್ಲಿ ಅವುಗಳನ್ನು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ನಿರ್ಣಯಿಸಿ ಅವರ ನಿರ್ಣಯವೇ ಅಂತಿಮವಾಗಿರುವುದು. ಈ ಕರಾರಿನ ಬಗ್ಗೆ ಯಾವುದೇ ಸಂಶಯಗಳು ಉಂಟಾದಲ್ಲಿ ಅವುಗಳನ್ನು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ನಿರ್ಣಯಿಸಿ ಅವರ ನಿರ್ಣಯವೇ ಅಂತಿಮವಾಗಿರುವುದು. ಈ ಕರಾರಿನ ಬಗ್ಗೆ ಯಾವುದೇ ಸಂಶಯಗಳು ಉಂಟಾದಲ್ಲಿ ಅವುಗಳನ್ನು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ನಿರ್ಣಯಿಸಿ ಅವರ ನಿರ್ಣಯವೇ ಅಂತಿಮವಾಗಿರುವುದು. ಈ ಕರಾರಿನ ಬಗ್ಗೆ ಯಾವುದೇ ಸಂಶಯಗಳು ಉಂಟಾದಲ್ಲಿ ಅವುಗಳನ್ನು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ನಿರ್ಣಯಿಸಿ ಅವರ ನಿರ್ಣಯವೇ ಅಂತಿಮವಾಗಿರುವುದು. ಈ ಕರಾರಿನ ಬಗ್ಗೆ ಯಾವುದೇ ಸಂಶಯಗಳು ಉಂಟಾದಲ್ಲಿ ಅವುಗಳನ್ನು ಕಾರ್ಖಾನೆಯ ಆಡಳಿತ ಮಂಡಲಿಯವರು ನಿರ್ಣಯಿಸಿ ಅವರ ನಿರ್ಣಯವೇ ಅಂತಿಮವಾಗಿರುವುದು.

(9) ಈ ಕರಾರಿನ ಪ್ರಕಾರ ಕಾರ್ಖಾನೆಯವರು ಕೊಡುವ ಸಕ್ಕರೆಯನ್ನು ಕಾರ್ಖಾನೆಯಿಂದ ಹೊರಗೆ ಸಾಗಿಸಲು ಕಾರ್ಖಾನೆಯವರು ಕೊಡುವ ಪರವಾನಗಿಯನ್ನು ಪಡೆಯಬೇಕು. ಈ ಪರವಾನಗಿಯನ್ನು ಪಡೆಯದೆ ಸಕ್ಕರೆಯನ್ನು ಕಾರ್ಖಾನೆಯಿಂದ ಹೊರಗೆ ಸಾಗಿಸಿದಲ್ಲಿ ಅಂತಹ ಸಕ್ಕರೆಯನ್ನು ಕಾರ್ಖಾನೆಯವರು ಜಪ್ತಿ ಮಾಡಿಕೊಳ್ಳಲು ಅಧಿಕಾರಿಗಳಾಗಿರುತ್ತಾರೆ.

ಕಾರ್ಖಾನೆಯ ಪರವಾಗಿ ಸಹಿ ಮಾಡಿದವರು

ಕಾರ್ಖಾನೆಯ ಮುದ್ರೆ

ಸಹಿ ಮಾಡಿದವರ ಹೆಸರು ಮತ್ತು ಹುದ್ದೆ

ಸಾಕ್ಷಿಗಳು

1. ಸಹಿ

2. ಸಹಿ

ದಿನಾಂಕ 8-5-1908

As per personal instructions received by me fr the Asst. Secy. the draft may issue
2/7/03

72

190

From (14)

SECY. TO THE GOVT. OF MYSORE,
GEN. & REV. DEPTS.

To

The President of the Municipalities,
Bangalore Cant

Dated 3/7/03

Despatched

Received P.d. 32

General No. 174-
No 39-01.

Enclosure No.

SECTION Samp
FILE No. 1645 190 - 01
1/14
SHEET No. 14 19

His letter no 1405 dy 11-6-03, stating, that the breaching of the Kunte complained against by the petitioners Nanjundayya and others of the Hoskote town, is a part of the scheme suggested by the Senior Surgeon & Sanitary Comr for improving the sanitation of that town; and that no loss will accrue to the petitioners

11

Recd 6/7/03

From the Same
No 26 dy 9/7/03

With reference to the above, I has the honour to request that the President will be so good as to state, whether the Kunte referred to is the Chickkere tank referred to in para 2 of Govt. Pro No 1648-52 of 26-7-02, or a different one; and in the latter case whether ~~that~~ want of water complained of by the petitioners would not be felt.

By order

JDB
for Secretary.
GL
1-7-03

74

L 4 7 / 15

Memo contd
Arg 10/7/03

The Municipal President
Bangalore District.

To The Secretary to the Govt
of Mysore
Genl & Rev Dept

Dated 8th } July 1903.
Despatched 9th }
Received

General No. 26
5th No.

Enclosure No.

Secy's docket No 174 of the
L.F.39-01

3rd July 03.

States that the breaching
of the Kunte referred to in the
Hosakote Tank is not the
Chickkere Tank, but merely
a water hole at some distance
from the said tank & it has since
been arranged not to breach
this hole or pond.

L 7.
9.7.03

ct. 8.
Put up file
Arg 10

Bangalore District

District Fund & Municipal President's Office

S. No 26 Bangalore, 8th/9 July 1903

From H. H. Sparkes Esquire

Municipal President

Bangalore District

To

H. V. Nanjundayya Esquire

Secretary to the Govt of Mysore

Revenue and General Depts

Sir,

With reference to your docket

No 174 SL12 dated the 3rd instant,

L 2139-01

requesting the undersigned to state whether the kere adjoining of the Kunde referred to in the Hoskote Taluk is the Chikkere tank referred to in para 2 of Govt. P.O. No 1648-52 dated

L 2139-01

26th July 1902, or a different one, I have the honor to state that, this is not the Chikkere, but merely a water hole at some distance from

the said tank and that it has since been arranged, on a personal inspection, not to breach this hole or pond, but merely to divert any water flowing into it. If the pond is filled up or kept dry, it does not interfere with the water supply of the surrounding houses.

I have the honor to be,

Sir

Your most obedt servant

for Municipal President

Mh Bangalore district

Mysore Govt., Gen. & Rev. Secretariat

Local Boards Branch

File No. (if any) and its date—

LH 39.01

2/7/03

Lamp

FILE N 104 of 1901-02.

SFR 46-14

77

Office Draft.

(16)

Progs. of the Govt. of H. H. the Maharaja of Mysore.

Read:

Letter No 2058 ✓ the 21st April 1903 from the Revenue Commissioner in Mysore forwarding for information copy of letter No D 1066 of the 1st April 1903 from the Dy Commr and Presdt of the Muthies in the Bangalore District together with extracts from his Notes of Inspection of the Hoskote town remarking that the Amildar (Vice Presdt) has not shewn fair progress in improving the Sanitation of the town which was ordered in G.P. No 1648-52 LH 39-01 dy the 26th July 1902

Order thereon No R 586-7 LH 39-01 D 3/8/03.

Recorded

2/8/03

78

Recorded with the
remark that the
Vice-President of the
Hoskote Municipality
should be warned to
show more activity
in this matter.

JB
3/8/03

JB W Secretary
Dep 14/7/03

JB
17/7/03

To.
The Revenue Commissioner
in Mysore
" Dy Comr and Presd.
of the Municipl
Bangalore Dist

It is observed that the A
is said to have acted against
Rev rules; but for that
minor glossing
the Pleader it is entitled
Govt Comms which is for
Mal matters due to Govt

03196
What has
Under Govt
Order 115 Mis
matter. While
the Dy Comr
should have
made his report
direct to Govt
add that observation
Mal mit of any
mbr of the Govt
is of a critical
opinion must
22.VII.03

Please see

Mysore Govt., Gen. & Rev. Secretariat

Branch

File No. (if any) and its date—

SECTT. No. Camp

FILE No. 1847 1901-01

47 15

R.

No 626

L.T. 39-01 3/8/03

Office Draft. 17

Progs. of the Govt. of H. H. the Maharaja of Mysore.

Read:

Letter No 26 dated 8 July 1903 from the Presidents of the Municipalities in the Bangalore District, submitting the report called for in the matter of a complaint preferred by certain residents of Hoskote for breaching a Kunte in the town ——.——

Order:

It is observed that in May 1903, certain residents of the Hoskote town complained that the Dy Comr of Bangalore had directed the breaching of a Kunte, which used to supply a good drinking water both for men and cattle and prayed for orders setting aside the Dy Comr's ~~direction~~ order. In reply to an enquiry made from this office the Dy Comr reports

that the tank in question is not the Chikkere tank referred to in para 20 of Govt Proc etc 1648-52 / L.939-01 dated 26th July 1902 but merely a water hole or pond at some distance therefrom, the breach ing of which formed a part of the scheme suggested by the Senior Surgeon and the Sanitary Engineer for improving the sanitation of the town and that it has since been arranged, on a personal inspection not to breach it but merely to divert any water flowing into it. He adds that, if the water supply of the surrounding houses will not be interfered with, if the pond is filled up or kept dry.

Under the foregoing circumstances, the President requested to dispose of the matter

so

81

so as to ensure sanitation without materially affecting the waters suitably of the towns ~~people~~.

Added on sheet 80

31/7/3
Secretary

[Secy's order]

Dy 20/7/03

To 20/7/03

The Dy Comrs and Presidents of the Cities in the Bangalore District

03/830
30.VII.03

Read 4/8/03

82

(18) 1903-04



From The Dy Commissioner
Bangalore District

To The Secretary to the Govt of Mysore
The Revenue and Genl Depts

Dated 31st The Revenue Commissioner
Despatched 1st September 1903 Bangalore
Received

General No.

Re No. 93.

Enclosure No One only

Office of the Revenue Commissioner
in Mysore
dated Bangalore 8th Sept 1903

No: 1203

Memo

Forwarded

Recommended.
for Revenue Commissioner

Sr. 8.
8-9-03

39-01.

Govt No: No 1648-52
1739-1801 dated
July 1902.

Forwards for information Copy of letter to the Senior Surgeon Bangalore Commissioner in regarding improving the sanitary condition of Hoskote Town.

To the D.C. Bangalore
for Info & Action
8/9/03

MYSORE GOVERNMENT SECRETARIAT
GENERAL & ESTABLISHMENT
9 SEP 1903
1526

16

L 2
5-9-03

L.F 39-01 forwarded
7/9/03

MGCPB—50 reams.—6-12-02.

RC 93

Sn: an Copy

Bangalore District
Dy Commis Sions Office

Bangalore 21st augst 1803

From,

H H Sharkes Esq
Dy Commis Sioner
Bangalore District

To,

H. V. Arnigumbayya Esq Mtms
Sers to the Court of mysore
Rev and Cent Depts

Thro'

V. P. Madhava Rao Esq C.S.
Rev: Comr in mysore

Sir,

I have the honor to

Submit, herewith, for information, a Copy
of my letter No 461 dated 29th augst 1803
to the senior Surgeon and Sanitary Commissioner

with

8 L

with the Government of Mysore, about improving the sanitary condition of the Hoskote Town in accordance with Government Proceedings No 1648-52 Sec 1739-1907 dated 26th July 1902.

I have the honour to be,

Sir,

Your most obedient Servant,

A Thompson

By Commissioner

85 encl 5 18

Letter No: @ 2461 dated 29th August 1903, from the Deputy Commissioner, Bangalore District, to the Senior Surgeon and Sanitary Commissioner with the Government of Mysore. _____

Adverting to Government Proceedings No: 1648-52 / L.7. 39-1901 of the 26th July 1902, sanctioning the carrying out of certain works for the improvement of the sanitation of the town of Hoskote, I have the honor to state that, I inspected this town on the 23rd instant, and found that my instructions regarding the filling in of pits and general draining of flood water have been fairly carried out. This visit was at a favourable time, as there had been continuous rain previously

and it was a good opportunity to see if any water stood about. There was very little collection of such water and that only in places where the new earth had sunk. The Amildar's attention was directed to this. The Hospital Assistant was also asked to ascertain and make a not of any localities where fever predominated and to visit such spots with the Amildar and others and see if any stagnant water, &c, existed in the near vicinity. note?

2. Out of the estimates sanctioned for Rs 811/-, Rs 673-13-2 have been up to date spent on the above works, excluding the reserve amount to be paid later on (viz works Nos: 1 and 2 mentioned in para 10 of the Superintending Engineer's letter referred to in para 3 of the

above quoted Government Proceedings) and there remains only the trench (No 3) leading the town water to the Dadkere to be filled in which is estimated at Rs 1047/- Before undertaking this work, I am of opinion that we should wait and see whether we have improved the health of the town by the works already executed, as personally I am rather sceptical as to whether the filling in of this trench will do much good, as it is situated one furlong from the nearest habitation - all the houses in the port having been evacuated. The Hospital Assistant informs me that the No: of fever cases has decreased very considerably this year, but it is still early yet-

and we must wait a few months more to come to any conclusion about its decline

3. Under these circumstances I request that you will be good enough to express your opinion about the filling in of the trench which has been ordered to be held in abeyance till I hear from you.

"Copy"

A.H. Sparkes
Deputy Commissioner

MMS

89

190 (19)

FROM

SECY. TO THE GOVT. OF MYSORE,
GEN. & REV. DEPTS.

To

The Deputy Commr
Bangalore South

SECTION Dis
FILE No. L.D. 1
SERIAL No. 17

Dated 26/8/03
Despatched
Received
General No. 1570
L.D. No. 39-01
Enclosure No.

x. Hay C.

With reference to his no 93 dated 31 ult, South
August 1903 (received the Rev: Commr's no 1203
of 8/9/03) forwarding copy of letter no 461 of 29/8/03 to the Senior Surgeon of Commr regarding the improvement of the Sanitary Condition of the Hoskote Town

With reference to the above has the honour to request that the D.C. in

70

be so good as to report

as the further action taken

regarding the ^ sanitary ^ improvement of the

~~insurance~~ condition of the town.

By order

Draft
17/10/03

JB 27/10/03
for Secy
27/10/03

91

30-ms

(20) L207



From G-314- 27-11-03

18

To H. V. Nanjundayya Esq BA LL.B
Secy to Govt
Genl Rev Depth.
Bangalore.

Sect Sanry.

File 1047 1/6:=01.
2c 18

Dated

Despatched

Received

General No.

No.

Enclosure No. 1

Re Improvement Scheme 27/13-1/03

Forwarding copy of letter from the chemical Examiner & Bacteriologist to G. re the improvement of the town of Hoskote.

L 4
3-6-11 ·1
memo 01/11/03 Bang

Sr G.
3/12

92

From,

Lt. Col. John Smyth M.D., I.M.S.

Offg.Senior Surgeon and Sanitary Commissioner,

with the Govt. of H.H. the Maharaja of Mysore,

Bangalore.

To,

H. V. Manjundayya Esqr, M.A.,M.L.

Secretary to the Govt. of H.H. the Maharaja of

Mysore, Genl. and Rev. Departments, Bangalore.

Dated 27th November 1903.

No.G. 314

Sir,

With reference to the Proceedings of Government and Order thereon No.4455/L.R.39-1901 dated 23rd September 1902 anent the improvement of the town of Hoskote, I have the honor to forward for information, the accompanying copy of letter No. 208 dated 19th November 1903 received from the Chemical Examiner and Bacteriologist to the Government of His Highness the Maharaja of Mysore.

I have the honor to be,

Sir,

your most obedient servant,

M.D.

Lt.Col.I.M.S.

Offg.Senior Surgeon and Sany.Commr.,

The Chemical Laboratory
& Bacteriological Institute.

No.208
Enc.1

Bangalore, 19th November 1903.

From,

Srinivasa Rao, M.A., M.D., C.M. & B.S.C. (Edin)
Chemical Examiner and Bacteriologist to the
Government of Mysore, Bangalore.

To,

Lt. Col. J. Smyth M.D., I.M.S.
Senior Surgeon and Sanitary Commissioner,
Bangalore.

Sir,

In returning your endorsement No.926 dated 11th November 1903, I have the honor to state that I again inspected Hoskote on the 15th instant and found the sanitation of the place good. Many of the pits were water used to collect had been filled up; the rest were being similarly attended to and the drainage of the town also had not been neglected. The statistics of the Hospital showed very few cases of malarial fever and the general health of the people was more satisfactory. Hardly any of the mosquitos examined were of the anopholes variety, the rest belonging to the genus culex. No larve were noticed anywhere in ditches &c., filled with water. The drainage of Hoskote empties itself into a "Halla" or ditch, which, passing from the south to the north of the town divides it into the eastern and the western portion and then takes a westerly course. Two of the waste weirs of the Hoskote small tank were, at the time

of

of my inspection, discharging into this "Malla". The water of the "Malla" at last finds its way, through its weir situated to the northwest of the town, into the Hoskote big tank. As the waste water weir, of the "Malla" is in a high level all the water in it is not fully discharged and some quantity therefore remains in this portion which is likely to serve as a suitable place for the breeding of mosquitos. If proper arrangements are made to prevent the stagnation of water near the waste weir of the "Malla", the town of Hoskote will, in my opinion, lose the notoriety it has acquired for malarial fevers.

I have etc.,

Sd/ M. Srinivasa Rao

Chemical Examiner and

Bacteriologist to the Government

of Mysore.

" True Copy "

M.D.

Lt.Col.I.M.S.

Offg.Senior Surgeon and Cany.Commr.,

95

1-12-03

(21)

1903/04 L213

From The Municipal President
Bangalore

To

The Secy to the Govt
of Mysore
Rev and Genl Depts

Dated 28 XII
Despatched 30 XII } Dec 1903

Received

General No.

S No. 481

Enclosure No

SECTION Camp 43 Cff
FILE No. 181 of 1900-04
SERIAL No. 19

Secy's docket No 1510/39-01 of 24th Oct 1903.

States that the Senior Surgeon has been requested to submit his opinion on the subject of the Sanitary condition of Hoskotetown and that on its receipt, a report will be submitted

Submitted

May this be simply filed?
Recd 8/12/03 & reminder issued

L4
1.12.03
As 4/12/03
drafter 8/12/03

MGCPB—50 reams.—6-12-02.

Sig 3/12

96

5481

Bangalore District,
Municipal President's office,
Camp Kankanhalli,
Dated 28th November 1903

From,

M. H. Sparkes Esquire,
Municipal President,
Bangalore District

To,

H. V. Nanjundayya Esquire B.A.B.L.,
Secretary to the Government of
Mysore, Revenue and General
Departments, Bangalore.

Sir,

With reference to your docket
No. 1510/39-0-1 of the 26th October 1903, request-
ing to report the further action taken
regarding the improvement of the Sanitary
Condition of the Hoskote Town, I have the
honor to state that, the Senior Surgeon
and Sanitary Commissioner has this day
been requested through a reminder to expedite
his opinion on the matter. After receipt of
reply the same will be communicated.

I have the honor to be,
Sir,
Your most obedient Servant,

M H Sparkes
Municipal President
Bangalore District.

97 (22) 1903/04 G333

From The Municipal President Bangalore

To [MYSORE GOVT GENERAL SECRETARIAT 15-12-3] The Secretary to the Govt of Mysore Rev and Genl Depts

Dated 12
Despatched 14 } Dec 1903.

Received

General No.

S No. 516

Enclosure No. One file with a copy of Board's resolution

Govt Rev: No 9527-9 of 25th Nov 1890.
390

I have the honour to submit herewith the file of proceedings of the Bangalore City Municipal Council noted in the margin, recommending the redemption of certain sites into which the plot of land in front of the Taluk Cutcherry and the L.F. Dispensary at Hoskote required for house building purposes was divided

Submitted for orders as to reference they await the return of the file from D.C.'s where it is pending. since 19/12/03.

S.J. 23/12/03

You had the file with receipt before the 5th Please get it

23/12

Dr. J.

Dy J 23/12

Dy to Co. 6/1/04

Dy No. 104 of 1904-9.

SER 20

L 7

15.12.03

B: Dr:-

Memo: 29/1/04 Rep.

Dno 16/12/03

Memo: quoted for 9527-9 dt 25/11/90 390; 1618-3 dt 26-7-02; 2739-9 DD 22/12/03

Dy J 14/1/04

MGCPB—50 reams—6-12-02.

Bangalore District
Deputy Commissioner's office
Dated 12th December 1903.

S No 516

One file with order of the Board's resolution

From,

H. Ed. Sparkes, Esquire
Municipal President
Bangalore District

To,

H. V. Nanjundiyya, Esquire M.A. M.L.
Secretary to the Government of Mysore
General and Revenue Departments
Bangalore.

Sir,

I have the honor to submit herewith a file of Canarese correspondence received with Hoskote Amildar's report No. 52 of 19th November 1903, in connection with the widening of the plot of land in front of the Taluq Cutcherry and the Local Fund Dispensary at Hoskote, and to state as follows:—

(1). The piece of land referred to above forms Survey No. 69 measuring 2 acres and 29 guntas. It was formerly a devadaya inam, and

and was acquired by exchange of a separate piece of land (vide Government Proceedings No. 9527-9/390 of 25th November 1890) for house building purposes. It was accordingly divided into 29 sites of which 28 sites were auctioned for Rs 553/- the amount realized being credited to the Treasury. The remaining one (site No. 11) was not sold owing to the existence of a big pit in it. Of the sites so sold two buildings have been raised on three of the sites which are now occupied and no attempt has yet been made to raise any buildings on the other sites.

(ii) In the year 1902, Lt. Lee Superintending Engineer Sanitary works, inspected this town and suggested among other things that on Sanitary grounds the Talaq cutcherry should be kept free of houses all round for a space of about 200 feet, (vide his letter No. 532/100 of 26th February 1902 to the Chief Engineer in Mysore) but the Senior Surgeon was of opinion that the cutcherry standing as it did, in a large compound with two sides free and open, there

was

was no necessity to keep all the sides of
a fall of houses (vide para 3 of Government
Proceedings No. 7648-52 SL's / L.F. 39 of 26th July 1902)

(III) If the houses are allowed to be raised
in the sites referred to in para (I) of this letter,
it will close upon one of the two free air spaces
vide sites referred to by the Senior Surgeon above
the land in question is low lying and in wet weather is numerous
water logged and unsightly for building sites.
It has therefore become very necessary
on Sanitary grounds that some steps should not
all of the sites now given out from Survey No. 69
should be redeemed.

(IV) The Amildar reports, that it is enough
if only 21 sites are redeemed. The seven
marginally noted Sites need not be redeemed, † Sites Nos. 1,
the first three as they are already built upon 2, 9, 10, 28, 29 &
and the other four being far off from the Cutchery half of nos. 22 & 2.
buildings. I think this may be carried out as
the seven sites alluded are on slightly
higher ground & do not become water
logged deducting the value of these 7 Sites,
there will only be a sum of Rupees 435/- to be
refunded to the present owners of the sites
to be redeemed.

(V) There is an old municipal garden (Survey No. 37)

with

with a stone masonry standing on it in the town and this being of little or no use to the public the municipal Board is of opinion that it may be sold and given out for cultivation purposes and the price of about 200 Rupees realized thereby may be used for paying part of this compensation.

VI The purchasers of the sites have all agreed to take back their sale amount and relinquish their rights over the sites and they have also executed a writing to that effect

VII The amount to be refunded being Rs Rupees 43 5/- and the approximate realization from the sale of the garden mentioned in para V of this letter being Rs 200/- the actual amount to be met by the municipal funds towards the redemption of the sites proposed will be only 235 Rupees or so The finances of the municipality admit of this amount being paid the closing balance of the last year being Rs 2338/10/11. The municipal

Members

members of the town have agreed to this amount being paid from the municipal funds, as per resolution of the municipal Board dated 19/11/1903, which is enclosed herein

For these reasons, I beg to recommend that the Government may be pleased to sanction the redemption of the sites in question and on the receipt of Government orders, the necessary refund bill will be submitted for sanction.

I have the honor to be,
Sir,
Your most Obedient Servant,

Marianna Rowlinsonja
Municipal President
Bangalore District

MMG

ಸಂಖ್ಯೆ:ಪಿಡಬ್ಲ್ಯೂಡಿ ೨೭ ಎಸ್‌ಎಸ್‌ಪಿ ೨೦೦೩

ಲೋಕೋಪಯೋಗಿ ಇಲಾಖೆ ಸಚಿವರ ಕಾರ್ಯದರ್ಶಿಗಳು

ವಿಷಯ:- ಪ್ರಸಕ್ತ ಸಾಲಿನ ಆಯವ್ಯಯದಲ್ಲಿ ಲೋಕೋಪಯೋಗಿ ಇಲಾಖೆಯ ಕಾಮಗಾರಿಗಳಿಗೆ ಅನುದಾನ ಒದಗಿಸುವ ಬಗ್ಗೆ.

ಉಲ್ಲೇಖ:- ಈ ಇಲಾಖೆಯ ಪತ್ರ ಸಂಖ್ಯೆ ಪಿಡಬ್ಲ್ಯೂಡಿ ೨೭ ಎಸ್‌ಎಸ್‌ಪಿ ೨೦೦೩ ದಿನಾಂಕ ೨೭.೧೦.೨೦೦೩

ಮೇಲ್ಕಂಡ ವಿಷಯ ಮತ್ತು ಉಲ್ಲೇಖಕ್ಕೆ ಸಂಬಂಧಿಸಿದಂತೆ ಈ ಇಲಾಖೆಯ ಕಾಮಗಾರಿಗಳಿಗೆ ಅನುದಾನ ಒದಗಿಸುವ ಬಗ್ಗೆ ಮಾನ್ಯ ಮುಖ್ಯಮಂತ್ರಿಗಳೊಂದಿಗೆ ಚರ್ಚಿಸಲು ಸಮಯಾವಕಾಶ ಕೋರಿ ಉಲ್ಲೇಖಿತ ಪತ್ರದಲ್ಲಿ ಕೋರಲಾಗಿತ್ತು. ಆದರೆ ಇಲ್ಲಿಯವರೆಗೂ ಸಮಯಾವಕಾಶ ನೀಡಿರುವುದಿಲ್ಲ. ಆದ್ದರಿಂದ ಈ ಇಲಾಖೆಯ ಕಾಮಗಾರಿಗಳಿಗೆ ಅನುದಾನ ಒದಗಿಸುವ ಬಗ್ಗೆ ಮಾನ್ಯ ಮುಖ್ಯಮಂತ್ರಿಗಳೊಂದಿಗೆ ಚರ್ಚಿಸಲು ಸಮಯಾವಕಾಶ ಕೋರಿ ಮತ್ತೊಮ್ಮೆ ಪತ್ರ ಬರೆಯಲಾಗಿದೆ.

ಇಂತಿ ತಮ್ಮ ವಿಶ್ವಾಸಿ

ಲೋಕೋಪಯೋಗಿ ಸಚಿವರು

ಪತ್ರ ಸಂಖ್ಯೆ ಪಿಡಬ್ಲ್ಯೂಡಿ ೨೭ ಎಸ್‌ಎಸ್‌ಪಿ ೨೦೦೩ ದಿನಾಂಕ ೨೭.೧೦.೨೦೦೩

II ಪತ್ರವು ಮೇಲ್ಕಂಡ ವಿಷಯ ಮತ್ತು ಉಲ್ಲೇಖಕ್ಕೆ ಸಂಬಂಧಿಸಿದಂತೆ ಈ ಇಲಾಖೆಯ ಕಾಮಗಾರಿಗಳಿಗೆ ಅನುದಾನ ಒದಗಿಸುವ ಬಗ್ಗೆ ಮಾನ್ಯ ಮುಖ್ಯಮಂತ್ರಿಗಳೊಂದಿಗೆ ಚರ್ಚಿಸಲು ಸಮಯಾವಕಾಶ ಕೋರಿ ಮತ್ತೊಮ್ಮೆ ಪತ್ರ ಬರೆಯಲಾಗಿದೆ.

ಇಂತಿ ತಮ್ಮ ವಿಶ್ವಾಸಿ

ಲೋಕೋಪಯೋಗಿ ಸಚಿವರು

ಪತ್ರ ಸಂಖ್ಯೆ:ಪಿಡಬ್ಲ್ಯೂಡಿ ೨೭ ಎಸ್‌ಎಸ್‌ಪಿ ೨೦೦೩

೨೭/೧೦

1904 (23)

L/473

8-1-04

1903/04.

From The Municipal President of the Bangalore District

To The Secretary to the Government of Bijapore Inam & Rao: Bahadur

Dated 6th January 1904.

Despatched

Received

General No.

No. 578

Enclosure No. 1 Copy

To the Secretary to Government

SECT: Samp

FILE N: 1040 of 1900-01

SER: N: 24

Secretary's
dem Ref No 1570.
L.J. 39-01.
of the 26th October 1903.

Submitting
for the sanction
of Government
the proposal
regarding the im-
provements required
to the town of
Bangalore.

The file is with the Chief Secretary

File put up 29/1/04. DRR @ 5-20 P.M.
8-1-04
Papers 29/1/04 DRR

J. J.

Aug 8/1/04

S.N. 578
Enclosure

Bangalore District
Municipal Presidents office

Dated 6th January
1904.

From,

H. H. Sparkes Esquire
Municipal President
of the Bangalore District

To,

H. V. Nanjundayya Esquire
M. A. M. L.
Secretary to the Government
of Mysore
Genl & Rev: Departmts

Sir,

With preference to
your docket No 1510
23.39-1, of
the 26th October 1903, regard-
ing improvements required
to the town of Hoskote, I
have the honor to submit,
herewith, Copy of Sanitary
Surgeons docket No 2501
of the 6th December 1903 in

reply to this office No 461 of
the 28th August and 933 of
the 6th November 1903 on the
subject, and to state that
it is useless to try to fill in
the ditch referred to in the
Senior Surgeon's letter above
cited, as it is the Kodi mullah
of the Chickballapur tank, and
it will be sufficient if the
lower Kodi is abandoned
and an aqueduct constructed
on a bridge to drain the water
from the present ditch. The
Executive Engineer, Bangalore
Division, will be requested
to prepare an estimate for
this aqueduct, and the

118 Ex. 3

23/a The Chemical Laboratory and
Bacteriological Institute
Bangalore 19th November 03.

No 208
19.1.

From, M Srinivasa Rao Esq. M.A. M.D.
C.M. F.R.S.C. (Edin)
Chemical Examiner and
Bacteriologist to the Govt
of my. Sore
Bangalore.

To, Lt Col: J Smyth M.D. I.M.S
Senior Surgeon and Sanitary
Commissioner
Bangalore

Sir,

In returning your endorsement No 926 dated 11th November 03, I have the honor to state that I again inspected Hoskote on the 16th Instant and found the Sanitation of the place good. Many of the pits where water used to collect had

had been filled up, the rest were being similarly attended to and the drainage of the town also had not been neglected. The Statistics of the Hospital showed very few cases of malarial fever and the general health of the people was more satisfactory Hardly any of the mosquitos examined were of the anopheles variety, the rest belonging to the genus Culex. No larvae were noticed anywhere, ie ditches to be filled with water. The drainage of Hoskote empties itself into a "nulla" or ditch which passing from the South to the North of the town divides it into the eastern and the western portion and then takes a westerly Course. Two of the waste weirs of the Hoskote small tank were at the time of my inspection discharging into the "nalla" The water of the Nalla at last finds its way through

through its weir situated to the southwest of the town into the Hoskote big tank. As the waste weir of the tank is at a high level all the water in it is not fully discharged and some quantity therefore remains in this portion which is likely to serve as a suitable place for the breeding of mosquitos If proper arrangements are made to prevent the stagnation of water near the waste weir of the tank, the town of Hoskote will, in my opinion, lose the notoriety it has acquired for malarial fevers

I have &c

(Sd) M Srinivasa Rao

Chemical Examiner &

Bacteriologist to the Govt

of Mysore.

Office of Senior Surgeon and

Sanitary Conr M. G.

No 1501. Dated Bangalore 27th November 1903

Copy of the above is

is forwarded to the Dy Commissioner, Bangalore District, for information with reference to his No R 933 dated 6th December 1903.

(Sd) J Symth M.D.
Lt Col: I.M.S
Offg Senior Surgeon and Sanr Comr

"Copy"

Lt Col Symth
Dy Commissioner

112

(24)

Read:- 19

Letter no 3111 dated 27th November 1903, from the Senior Surgeon and Sanitary Commissioner, ~~forwarding~~ submitting for the information of Government, a copy of the Chemical Examiner and Bacteriologist's letter no 208 of 19th November 1903, reporting on the present Sanitary condition of the Hoshiarpur town, and offering suggestions for its further improvement.

Order thereon No 2717-19
2739-01
dt 27/11/04

Recorded with the

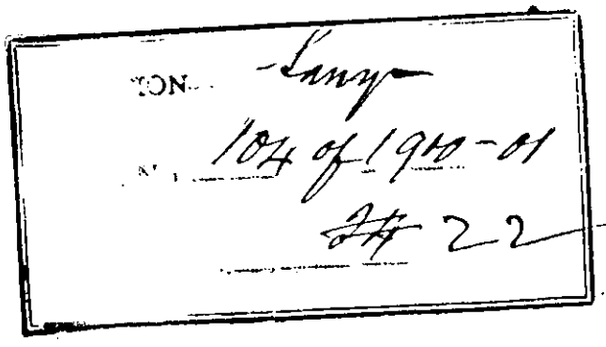

observation that a copy
of the Chemical Examiner
and Bacteriologists' letter
will be sent to the
Deputy Commissioner &
President of the municipalities,
Bangalore District, for
information. and guidance.

The Precedent in election to withdraw the suggestion made by Dr Sreenivasa Rao regarding the prevention of the contamination of water near the waste weir of the Nalla

Secretary
11/12/03

14/12/03

To
The Senior Surgeon & Sanitary Comr
" Dy. Comr & Presdt. of the
Mcltis Bangalore &
with copy of the letter.

23/1/04
06504

21.1.04

Mysore Govt. Gen. & Rev. Secretariat,

Local Boards Branch

File No. (if any) and its date—

SEC Samp 43-01

FILE ~~1614 of 1900-01~~

25 23

a b d 11/2/04

Secy 24/2/04

Office Draft.

25

Progs. of the Govt. of H. H. the Maharaja of Mysore.

Read:— Letter No 516 dy 12th December 1903, from the President of the Municipality Bangalore District, stating that the plot of land in front of the Taluk Cutcherry at Hoskota bearing Survey no 69 and measuring 2ac 29 guntas, was acquired in 1890 for housebuilding purposes and allotted into 29 sites, of which 28 were sold for Rs 553 ~~which~~ the sale proceeds ~~was~~ credited to ~~the~~ Municipal funds; that only two buildings have been raised on three of the sites, no attempt being

made it a rule ~~any~~ buildings
on the other sites; that
the land in question is
objectionable for building
purposes, as it is low lying
and in wet weather more
or less water-logged, and
~~it~~ is intended to be kept
free and open ~~as~~ para 3
of G. O. No 1648-52 dt 26-7-02
L. 739-01
and proposing therefore,
to redeem 21 out of the 28
sites by refunding the
sale amount of Rs 435 to
the purchasers, who have
~~all~~ agreed to relinquish
their rights on payment
of the sale amounts,
and ~~to meet~~ the cost
of redemption being met from
Rs 200 expected to be

realized from selling the
Municipal garden (Survey no 37)
measuring 1ac - 11 guntas)
which is of no use to the
Municipality ~~and giving it out for~~
~~cultivation~~, and from
the balance in favour
of the Municipality.

3106
L.7-39-31 / 22/2/04

Order thereon
Rd.

Under the circumstances stated,
the President's proposals
to sell the Municipal
garden & to resume the
21 sites, are sanctioned
subject to the submission
of a supplemental budget
providing funds to meet the
cost of (2 sites) sites to be resumed.

Recd 17.2.04

15/2/04
Secretary
Ex. 22/2/04

Read 20/2/04

To
The President of the Municipality Bangalore
& Vernacular records + plan

Mysore Govt. Gen. & Rev. Secretariat,

Local Boards Branch

File No. (if any) and its date—

117

Office Draft.

(26)

Progs. of the Govt. of H. H. the Maharaja of Mysore.

W&L 11/2/04

SECTION Secy

FILE NO. 10 & L 1900-01

26

Read:— Letter no 578 dated 6th January 1904, from the President of the Municipality Bangalore District, stating that it is useless ~~to try~~ to fill the ditch referred to by Dr. Srinivasa Rao in his letter no 208 dt 19th Nov. 1903 regarding the Sanitary improvement of Hoskote, as it is the Kodi nallah of the Chikatere tank of that place; that it will be sufficient if the lower Kodi is abandoned, and an aqueduct, constructed on a bridge to drain the water from the present ditch; and that the

Executive Engineer will be
requested to prepare an
~~an~~ estimate for the said
aequaduct

—u.—

Order thereon to 3117–19
1239–01
d/22/2/04.

Sir / to Dr Srinivas Rao

Recorded with the ~~observation~~
arrangement ~~that~~ the early submission
of the estimate referred to
will be awaited. ~~A~~ copy
of the Communication sent
to Dr. Sreenivasa Rao through
the Senior Surgeon, for
information.

Received to be retd will
have the effect of
preventing the
— loan of water —

read above will be

07080
12.2.04

15/2/04
Secretary
23/2/04

To
The President of the Talties Bangalore
Dist
Senior Surgeon

Dr Sreenivasa Rao thro S. Surgeon

Recd 25/2/04

21 From the Presidt Bangalore Dist
Dy No 1473. No 5788 of 6.1.04.

Submits report called for in Sl No 19.

22 To the Senior Surgeon and Sany Commr & the Dy: Commr
No 2717-18 of 27.1.04.

Records Sl No 20 with certain Observations

23 To the Presidt Bangalore Dist
No $\frac{3106}{39\cdot01}$ of 22.2.04

Sanctions the resumption of Sites recommended in Sl No 22.

24 To the Presidt Bangalore Dist
No $\frac{3117-19}{39-01}$

Approves of the arrangement proposed for preventing stagnation of water in Hoskote Town.

H. Narasimha Murthi Rao
Clerk

Commissioner
K.I.